

FEATURES

- * Glass Passivated Chip Junction
- * Reverse Voltage - 50 to 1000 V
- * Forward Current - 3.0 A
- * High Surge Current Capability
- * Designed for Surface Mount Application

MECHANICAL DATA


- * Case: UMSB
- * Terminals: Solderable per MIL-STD-750, Method 2026

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

3.0 Ampere

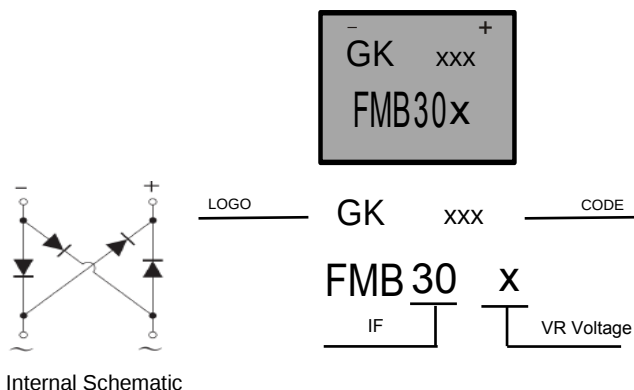

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	FMSB30A	FMSB30B	FMSB30D	FMSB30G	FMSB30J	FMSB30K	FMSB30M	UNIT
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	3.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	100							A
I ² t Rating for Fusing (1ms < t < 8.3ms)	41.5							A ² S
Maximum Forward Voltage Drop per Bridge Element at 3.0A.	1.3							V
Maximum DC Reverse Current Ta=25°C	5.0							μA
at Rated DC Blocking Voltage Ta=100°C	200							μA
Maximum Reverse Recovery Time (Note 1)	500							ns
Typical Junction Capacitance (Note 2)	40							pF
Typical Thermal Resistance R JA (Note 3)	30							°C/W
Operating and Storage Temperature Range Tj, Tstg	-65 — +150							°C

NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. Thermal Resistance from Junction to Ambient.

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

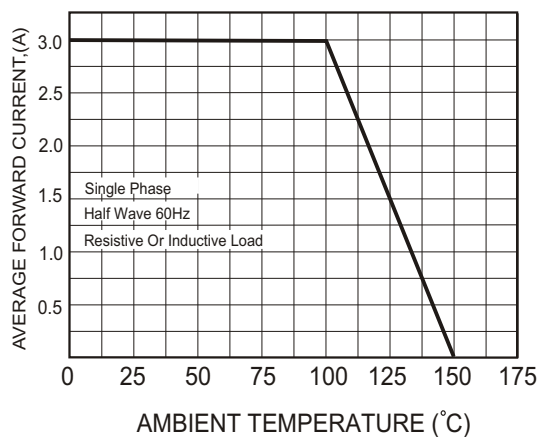


FIG.2-TYPICAL FORWARD CHARACTERISTICS

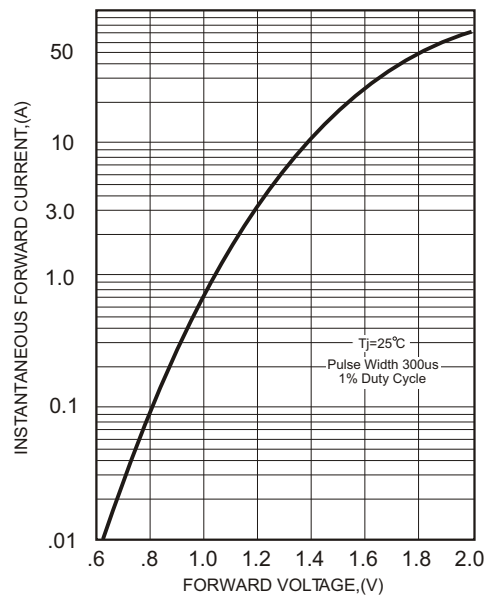


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

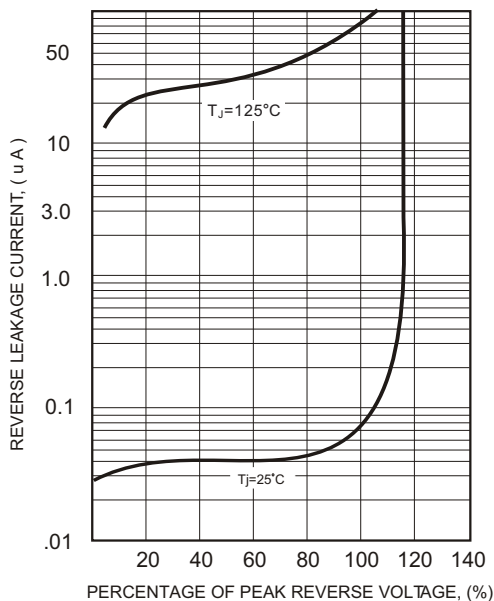


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


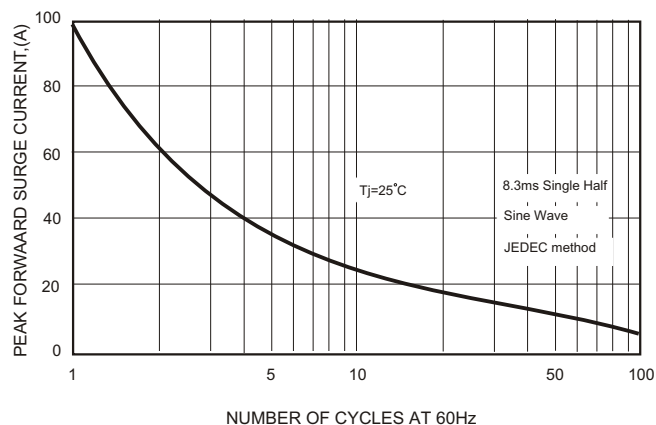


FIG.5-TYPICAL JUNCTION CAPACITANCE




Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max ($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature (T_L) (Liquid us)	+217 °C
	-Temperature (t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

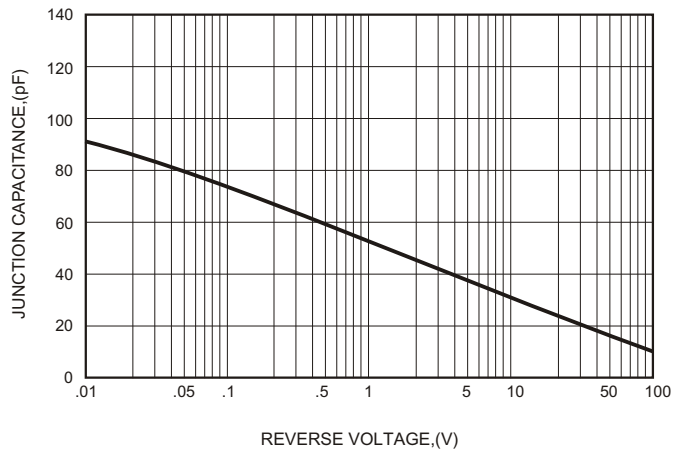


Package Dimensions & Suggested Pad Layout

UMSB


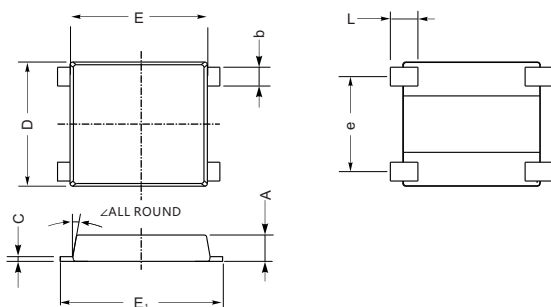


UNIT		A	C	D	E	E ₁	L	e	b	∠
mm	max	1.5	0.29	7.0	7.6	8.9	1.6	5.3	1.15	10°
	min	1.3	0.17	6.2	7.1	8.4	1.0	4.9	0.95	
mil	max	59	12	276	299	350	55	209	45	
	min	51	7	244	280	331	31.5	193	37	



Dimensions	
Z	9.4
X	1.8
Y	2.1
C	5.1

Tape & reel specification

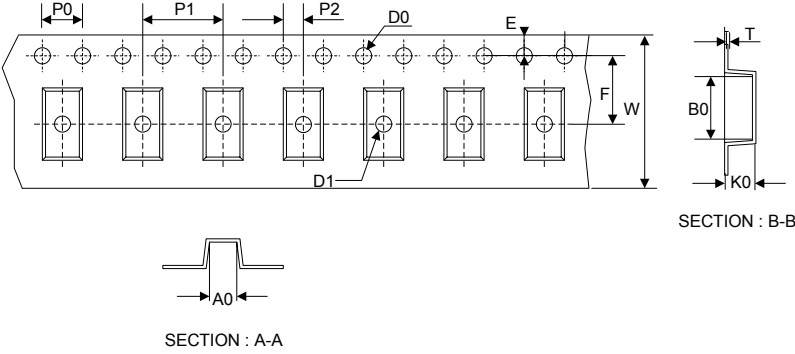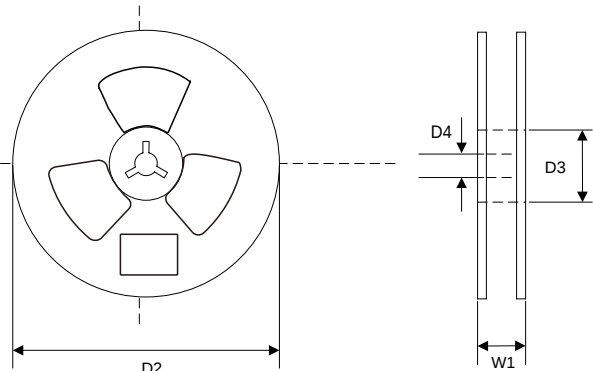Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	12.00±0.20
		P2	2.00±0.20
		D0	1.60±0.15
		D1	1.60±0.15
		E	1.75±0.20
		F	7.50±0.15
		W	16.00±0.20
		A0	7.00±0.25
		B0	9.30±0.25
		K0	1.80±0.25
		T	0.25±0.10
		D2	330.0±5.0
13" Reel		Symbol	Dimension (mm)
		D3	73Min.
		D4	16.0±2.5
		W1	21.0±3.0
		Quantity: 3000PCS	