

VOLTAGE RANGE

150 to 200 Volts

CURRENT


8.0 Ampere

FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-202F method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any

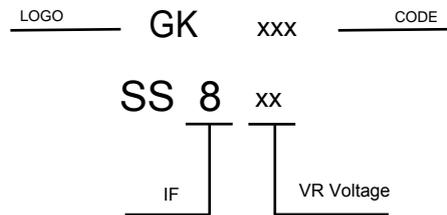

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | SS815 | SS820 | UNITS |
|--|------------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage | 150 | 200 | V |
| Maximum RMS Voltage | 105 | 140 | V |
| Maximum DC Blocking Voltage | 150 | 200 | V |
| Maximum Average Forward Rectified Current | 8.0 | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 150 | | A |
| Maximum Instantaneous Forward Voltage at 8.0A | 0.92 | | V |
| Maximum DC Reverse Current Ta=25°C | 0.02 | | mA |
| at Rated DC Blocking Voltage Ta=100°C | 2 | | mA |
| Typical Junction Capacitance (Note1) | 400 | | pF |
| Typical Thermal Resistance R _{JA} (Note 2) | 55 | | °C/W |
| Operating Temperature Range T _J | -65 — +175 | | °C |
| Storage Temperature Range T _{STG} | -65 — +175 | | °C |

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2.P.C.B. mounted with 0.4x0.4" (10x10mm) copper pad areas

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

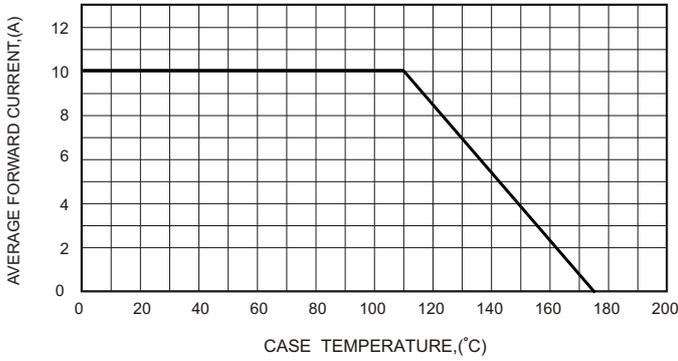


FIG.2-TYPICAL FORWARD CHARACTERISTICS

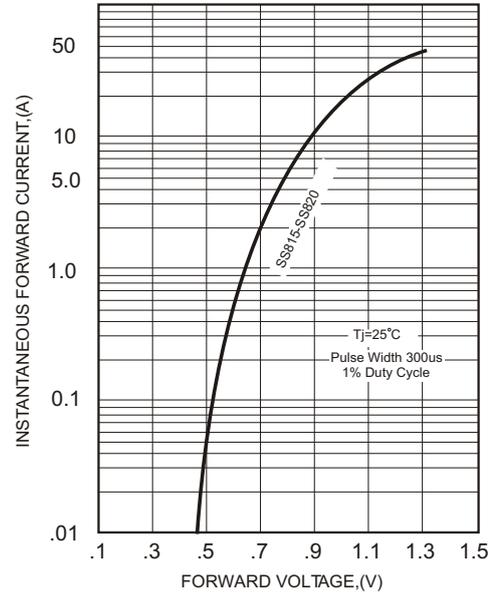


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

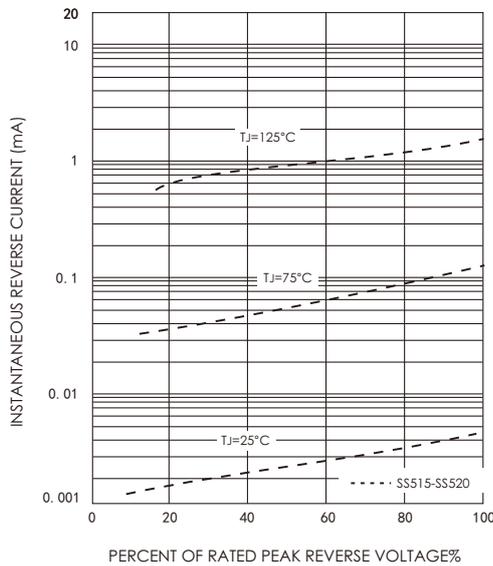


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


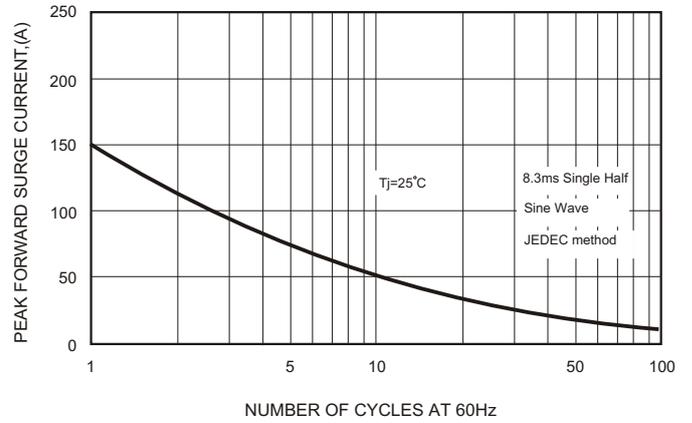


FIG.5-TYPICAL JUNCTION CAPACITANCE




Soldering parameters

| Reflow Condition | | Pb-Free assembly (see as below) |
|---|-----------------------------------|------------------------------------|
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150 °C |
| | -Temperature Max($T_{s(max)}$) | +200 °C |
| | -Time (Min to Max) (ts) | 60-180 secs. |
| Average ramp up rate (Liquid us Temp (T_L) to peak) | | 3 °C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3 °C/sec. Max |
| Reflow | -Temperature(T_L)(Liquid us) | +217 °C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_P) | | +260(+0/-5) °C |
| Time within 5 °C of actual Peak Temp (t_p) | | 30 secs. Max |
| Ramp-down Rate | | 6 °C/sec. Max |
| Time 25 °C to Peak Temp (T_P) | | 8 min. Max |
| Do not exceed | | +260 °C |

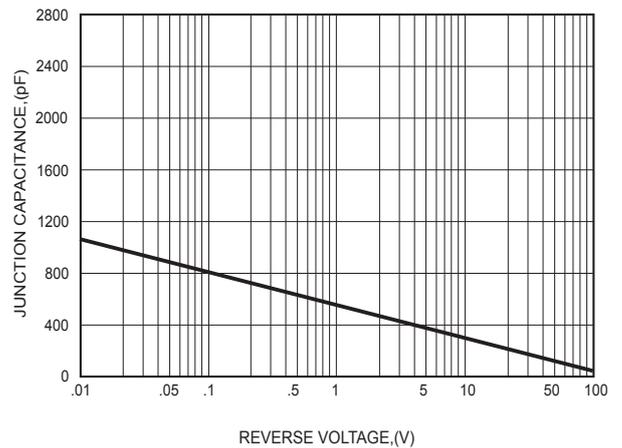


Package Dimensions & Suggested Pad Layout

SMB

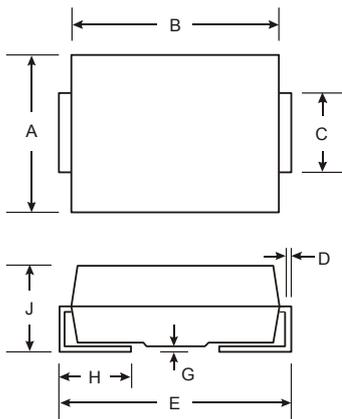

| SMB | | |
|----------------------|------|------|
| Dim | Min | Max |
| A | 3.30 | 3.94 |
| B | 4.06 | 4.70 |
| C | 1.91 | 2.11 |
| D | 0.15 | 0.31 |
| E | 5.08 | 5.59 |
| G | | 0.20 |
| H | 0.76 | 1.50 |
| J | 2.13 | 2.44 |
| All Dimensions in mm | | |



| Dimensions | Value (in mm) |
|------------|---------------|
| C | 4.70 |
| G | 2.20 |
| X | 2.50 |
| X1 | 7.20 |
| Y | 2.80 |

Tape & reel specification

| Symbol | Dimension (mm) |
|-------------------|----------------|
| P0 | 4.00±0.20 |
| P1 | 8.00±0.20 |
| P2 | 2.00±0.20 |
| D0 | 1.60±0.20 |
| D1 | 1.60±0.20 |
| E | 1.75±0.20 |
| F | 5.50±0.15 |
| W | 12.00±0.20 |
| A0 | 4.00±0.20 |
| B0 | 5.45±0.20 |
| K0 | 2.50±0.25 |
| T | 0.20±0.10 |
| D2 | 330.0±5.0 |
| D3 | 73.0Min. |
| D4 | 14.0±2.5 |
| W1 | 16.0±2.5 |
| Quantity: 3000PCS | |

