




FEATURES

- For general AF applications
- Low collector-emitter saturation voltage
- Complementary types: BC817 (NPN)


Classification of hFE

| Type | BC817-16 | BC817-25 | BC817-40 |
|---------|----------|----------|----------|
| Range | 100-250 | 160-400 | 250-630 |
| Marking | 6A | 6B | 6C |

SOT-23



1.BASE
2.EMITTER
3.COLLECTOR

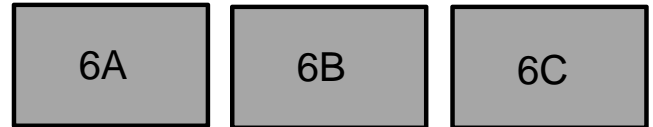

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings Ta = 25°C

| Parameter | Symbol | Rating | Unit |
|--------------------------------|------------------|------------|------|
| Collector - Base Voltage | V _{CB0} | 50 | V |
| Collector - Emitter Voltage | V _{CE0} | 45 | |
| Emitter - Base Voltage | V _{EB0} | 5 | |
| Collector Current - Continuous | I _C | 0.5 | A |
| Collector Power Dissipation | P _C | 0.3 | W |
| Junction Temperature | T _J | 150 | °C |
| Storage Temperature Range | T _{stg} | -55 to 150 | |









Characteristics ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------------|---------------|--|-----|-----|-----|---------------|
| Collector- base breakdown voltage | V_{CBO} | $I_C = 100 \mu\text{A}, I_E = 0$ | 50 | | | V |
| Collector- emitter breakdown voltage | V_{CEO} | $I_C = 10 \text{ mA}, I_B = 0$ | 45 | | | |
| Emitter - base breakdown voltage | V_{EBO} | $I_E = 100 \mu\text{A}, I_C = 0$ | 5 | | | |
| Collector-base cut-off current | I_{CBO} | $V_{CB} = 45 \text{ V}, I_E = 0$ | | | 0.1 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB} = 4 \text{ V}, I_C = 0$ | | | 0.1 | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$ | | | 0.7 | V |
| Base - emitter saturation voltage | $V_{BE(sat)}$ | $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$ | | | 1.2 | |
| Base - emitter voltage | V_{BE} | $V_{CE} = 1 \text{ V}, I_C = 500 \text{ mA}$ | | | 1.2 | |
| DC current gain | $h_{FE(1)}$ | $V_{CE} = 1 \text{ V}, I_C = 100 \text{ mA}$ | 100 | | 630 | |
| | $h_{FE(2)}$ | $V_{CE} = 1 \text{ V}, I_C = 500 \text{ mA}$ | 40 | | | |
| Collector output capacitance | C_{ob} | $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$ | | 10 | | μF |
| Transition frequency | f_T | $V_{CE} = 5 \text{ V}, I_C = 10 \text{ mA}, f = 100 \text{ MHz}$ | 100 | | | MHz |

Classification of $h_{FE(1)}$

| Type | BC817-16 | BC817-25 | BC817-40 |
|---------|----------|----------|----------|
| Range | 100-250 | 160-400 | 250-630 |
| Marking | 6A | 6B | 6C |

RATING AND CHARACTERISTIC CURVES

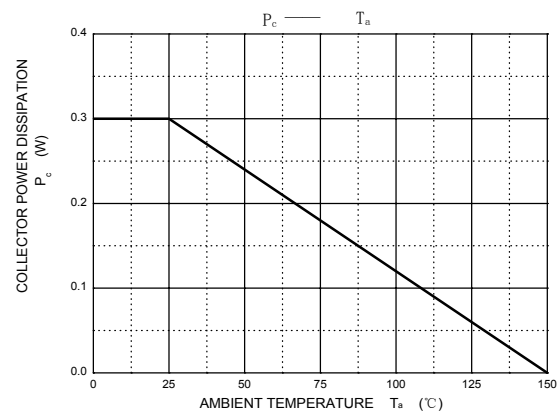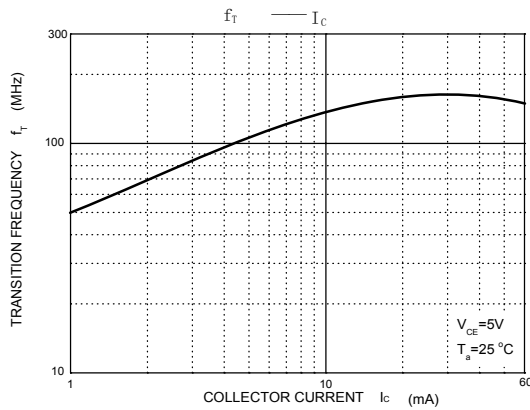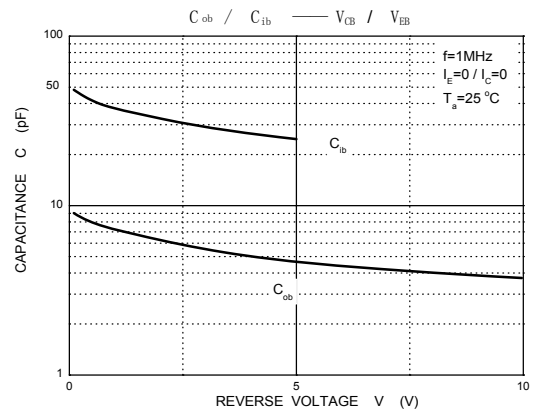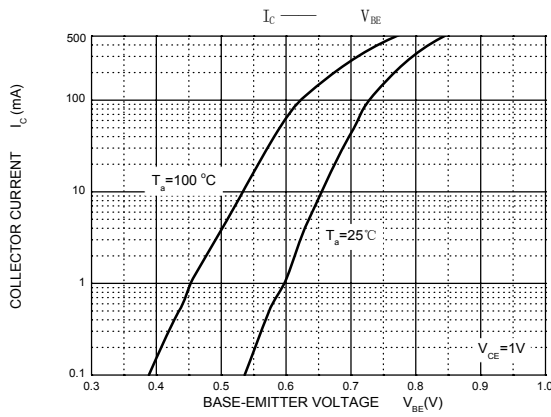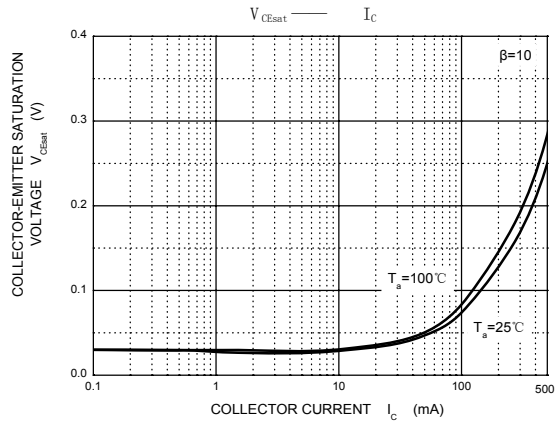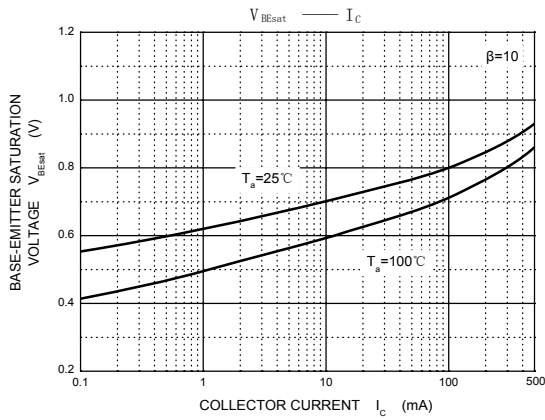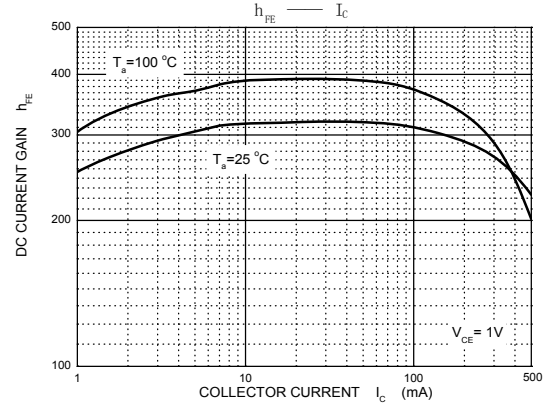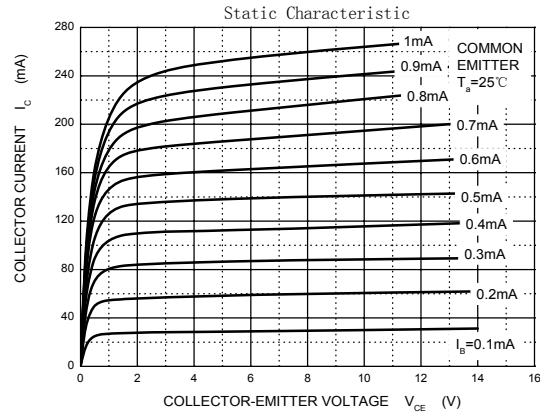


Soldering parameters

| Reflow Condition | | Pb-Free assembly (see as below) |
|---|-----------------------------------|------------------------------------|
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (ts) | 60-180 secs. |
| Average ramp up rate (Liquid us Temp (T_L) to peak) | | 3°C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L)(Liquid us) | +217°C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_P) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max |
| Ramp-down Rate | | 6°C/sec. Max |
| Time 25°C to Peak Temp (T_P) | | 8 min. Max |
| Do not exceed | | +260°C |



Package Dimensions & Suggested Pad Layout

SOT23

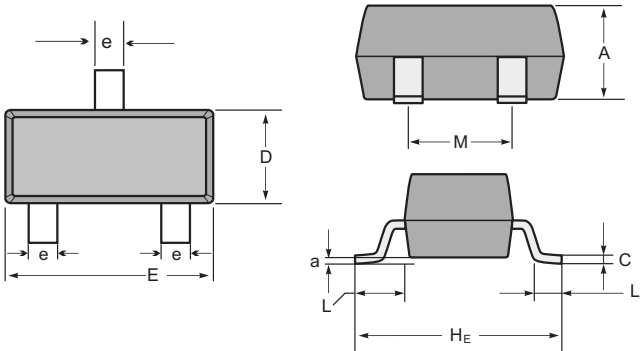


SOT-23 mechanical data

| UNIT | A | C | D | E | He | e | M | L | L ₁ | a | |
|------|-----|-----|------|-----|-----|-----|-----|------|----------------|------------|------|
| mm | max | 1.1 | 0.15 | 1.4 | 3.0 | 2.6 | 0.5 | 1.95 | 0.55 (ref) | 0.36 (ref) | 0.0 |
| | min | 0.9 | 0.08 | 1.2 | 2.8 | 2.2 | 0.3 | 1.7 | | | 0.15 |
| mil | max | 43 | 6 | 55 | 118 | 102 | 20 | 77 | 22 (ref) | 14 (ref) | 0.0 |
| | min | 35 | 3 | 47 | 110 | 87 | 12 | 67 | | | 6 |

| Dimensions | SOT23 |
|------------|-------|
| Z | 2.9 |
| X | 0.8 |
| Y | 0.9 |
| C | 2.0 |
| E | 1.35 |

Tape & reel specification

Tape

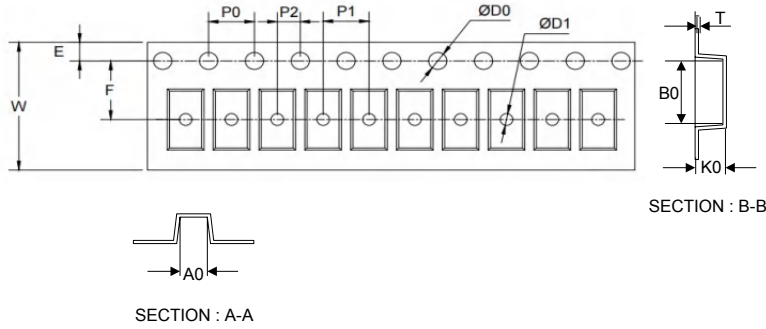

| Symbol | Dimension (mm) |
|--------|----------------|
| P0 | 4.00±0.10 |
| P1 | 4.00±0.10 |
| P2 | 2.00±0.10 |
| D0 | 1.55±0.10 |
| D1 | 1.05±0.10 |
| E | 1.55±0.10 |
| F | 3.60±0.10 |
| W | 8.00±0.10 |
| A0 | 3.80±0.20 |
| B0 | 3.25±0.20 |
| K0 | 1.45±0.10 |
| T | 0.25±0.05 |
| D2 | 178.0±3.0 |
| D3 | 55Min. |
| D4 | R24.0±3.0 |
| G | R82.0±3.0 |
| I | 13.0±2.0 |
| W1 | 11.0±3.0 |

7" Reel



Quantity: 3000PCS