


**FEATURE**

- Maximum output current  
 $I_{OM}: 0.1A$
- Output voltage  
 $V_O: 8V$
- Continuous total dissipation  
 $P_D: 0.5 W$




**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Units
Input Voltage	$V_i$	30	V
Operating Junction Temperature Range	$T_{OPR}$	0~+150	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

**ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	$V_o$	$25^{\circ}C$	7.7	8.0	8.3	V	
		0-125°C	$10.5V \leq V_i \leq 23V, I_o = 1mA \sim 40mA$	7.6	8.0	8.4	V
			$I_o = 1mA \sim 70mA$	7.6	8.0	8.4	V
Load Regulation	$\Delta V_o$	$I_o = 1mA \sim 100mA, 25^{\circ}C$		18	80	mV	
		$I_o = 1mA \sim 40mA, 25^{\circ}C$		10	40	mV	
Line regulation	$\Delta V_o$	$10.5V \leq V_i \leq 23V, 25^{\circ}C$		42	175	mV	
		$11V \leq V_i \leq 23V, 25^{\circ}C$		36	125	mV	
Quiescent Current	$I_q$	$25^{\circ}C$		4	6	mA	
Quiescent Current Change	$\Delta I_q$	$11V \leq V_i \leq 23V, 0-125^{\circ}C$			1.5	mA	
	$\Delta I_q$	$1mA \leq I_o \leq 40mA, 0-125^{\circ}C$			0.1	mA	
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz, 25^{\circ}C$		54		μV	
Ripple Rejection	RR	$13V \leq V_i \leq 23V, f = 120Hz, 0-125^{\circ}C$	37	46		dB	
Dropout Voltage	$V_d$	$25^{\circ}C$		1.7		V	


**TYPICAL APPLICATION**

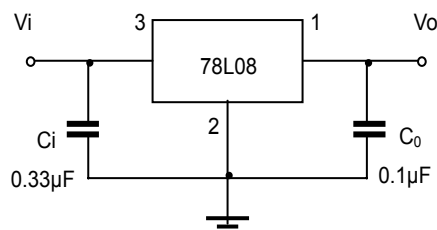


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

RATING AND CHARACTERISTIC CURVES


**Output Characteristics**

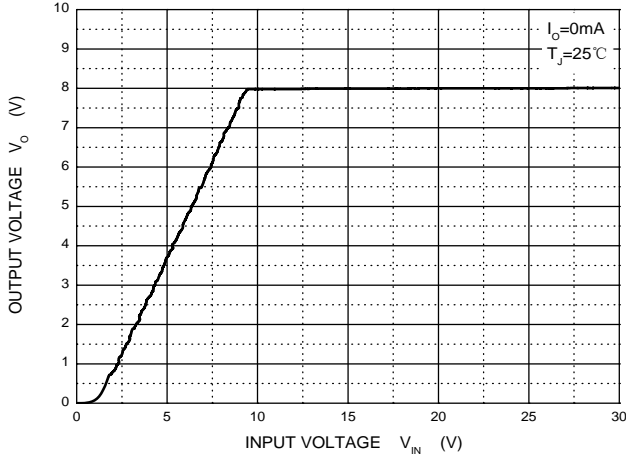


**Dropout Characteristics**

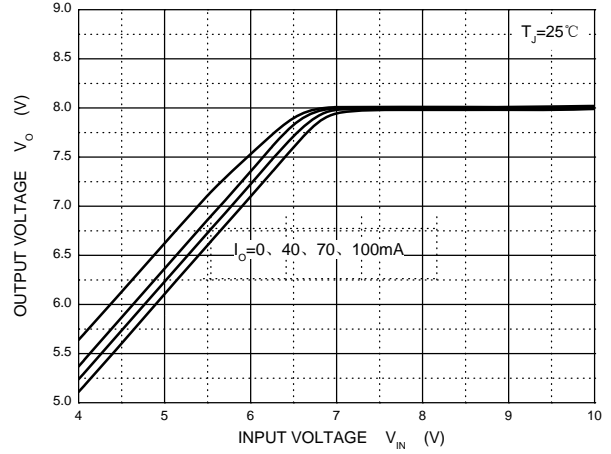


**Quiescent Current vs Input Voltage**

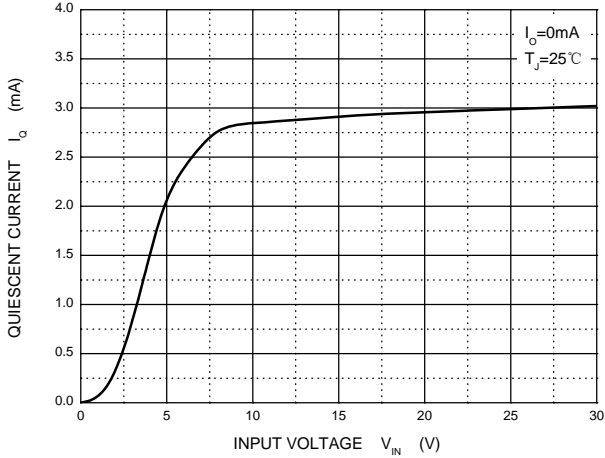


**Current Cut-off Grid Voltage**

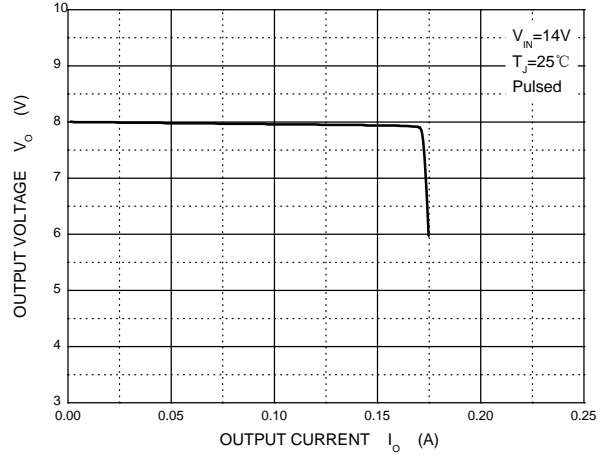

**Output Voltage vs Junction Temperature**

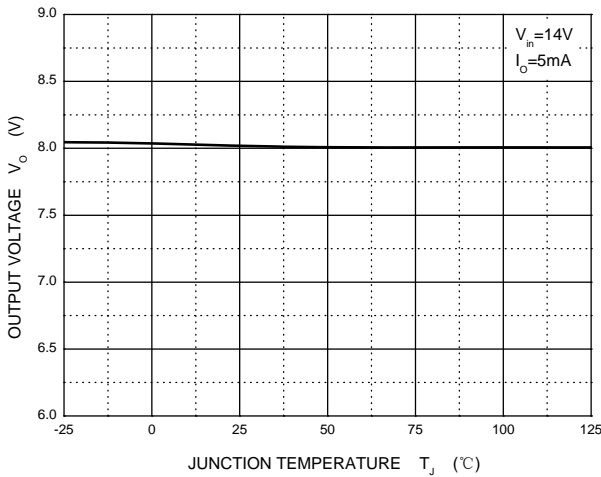


**Power Derating Curve**

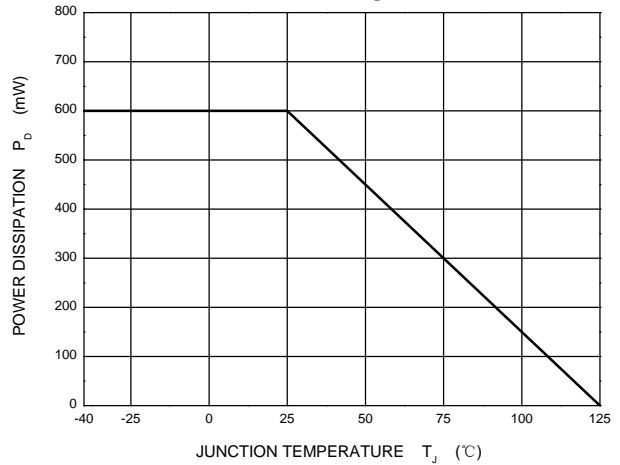


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150 °C
	-Temperature Max ( $T_{s(max)}$ )	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak)		3 °C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature ( $T_L$ ) (Liquid us)	+217 °C
	-Temperature ( $t_L$ )	60-150 secs.
Peak Temp ( $T_P$ )		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp ( $T_P$ )		8 min. Max
Do not exceed		+260 °C

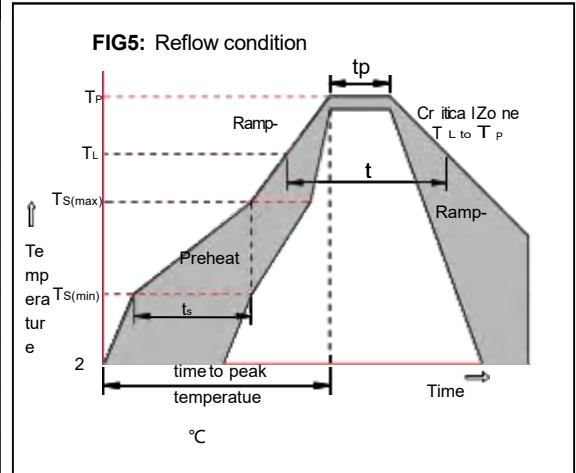


Package Dimensions & Suggested Pad Layout


SOT89

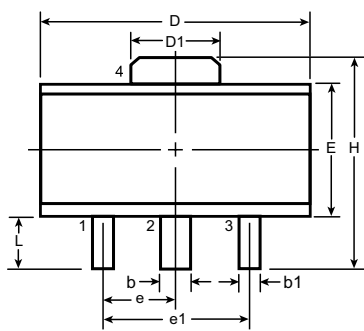

Top View

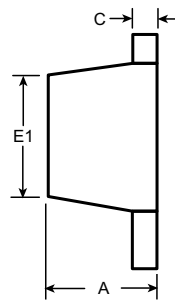

Side View

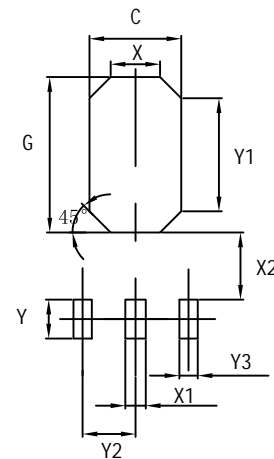


Symbol	A	b	b1	C	D	D1	E	E1	e	e1	H	L	
Dimensions (mm)	MIN	1.40	0.44	0.36	0.3	4.40	1.50	2.29	2.00 <sup>†</sup>	1.50	3.00	3.94	0.89
	NOM	-	-	-	-	-	-	-	-	BSC	BSC	-	-
	MAX	1.60	0.56	0.48	0.5	4.60	1.75	2.60	2.29	-	-	4.25	1.20

Dimensions	Value (in mm)
C	2.50
G	3.60
X	1.40
X1	0.90
X2	0.90
Y	1.40
Y1	2.60
Y2	1.50
Y3	0.90


Tape & reel specification

Tape

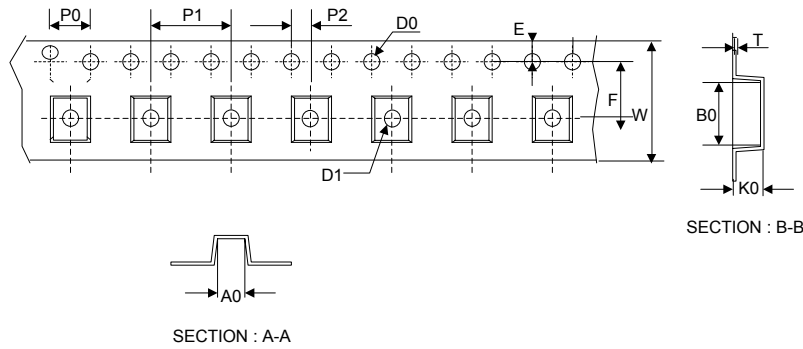

Symbol	Dimension (mm)
P0	4.00±0.20
P1	8.00±0.20
P2	2.00±0.20
D0	1.60±0.20
D1	1.60±0.20
E	1.75±0.20
F	7.50±0.15
W	16.00±0.20
A0	6.30±0.20
B0	8.25±0.20
K0	2.60±0.20
T	0.23±0.10
D2	180.0±5.0
D3	60Min.
D4	R32.0±2.0
G	R86.5±2.0
H	R30.0±2.0
I	13.0±2.0
W1	13.20±2.0
W2	16.50±2.0

13" Reel

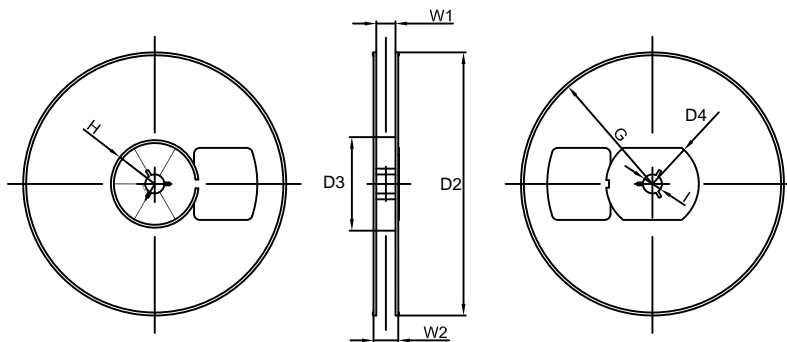

Quantity: 1000PCS