

FEATURES

Ultra small mold type
Low V_F
High reliability

VOLTAGE RANGE


30 Volts

CURRENT


200mA

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any



SOD-523



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS













Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Mean Rectifying Current	I_O	200	mA
Peak Forward Surge Current (60Hz for Cyc.)	I_{FSM}	1	A
Junction Temperature	T_j	125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	- 40 to + 125	$^{\circ}\text{C}$

Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$


Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 200\text{ mA}$	V_F	0.6	V
Reverse Current at $V_R = 10\text{ V}$	I_R	30	μA

RATING AND CHARACTERISTIC CURVES

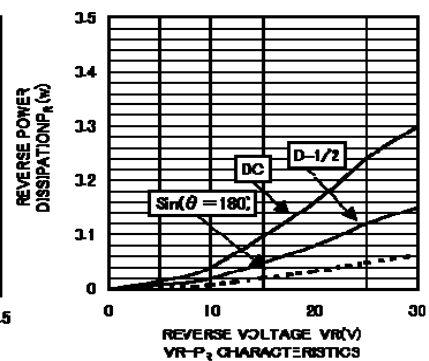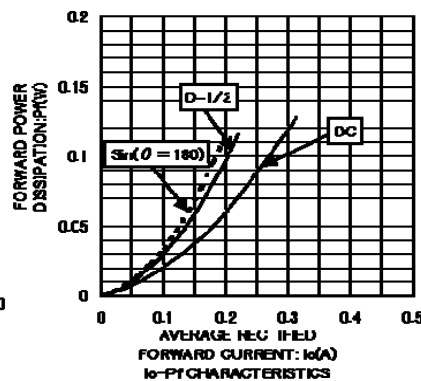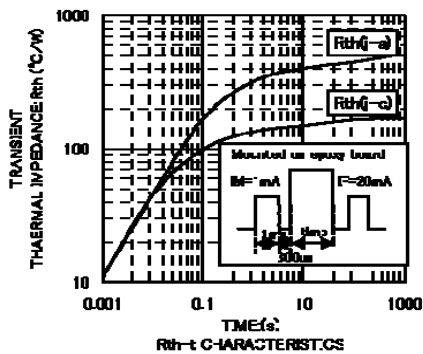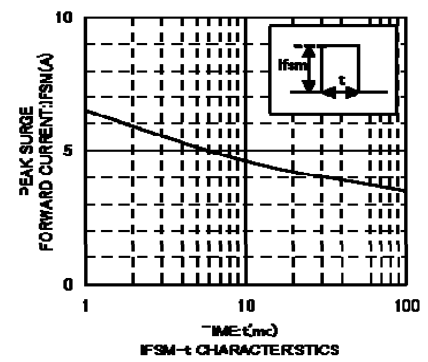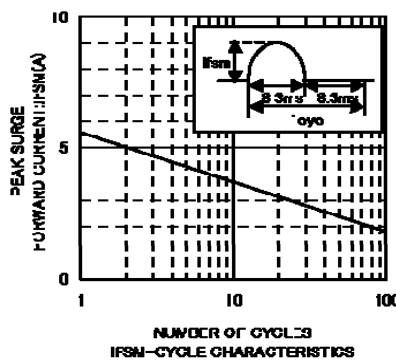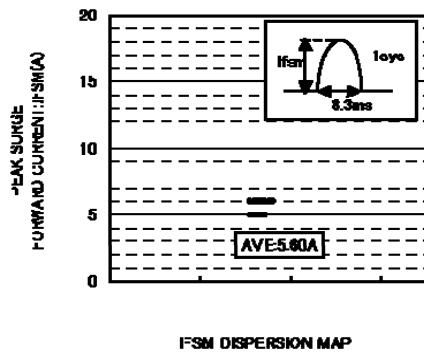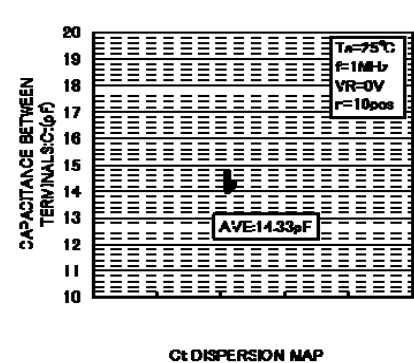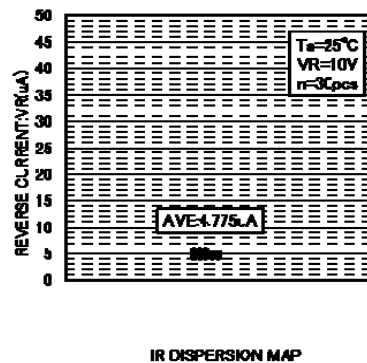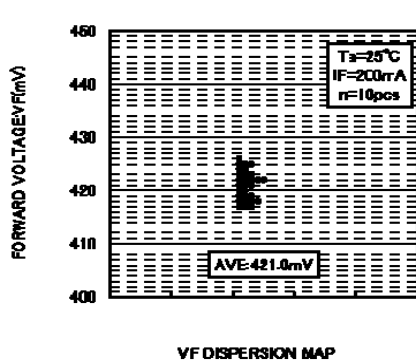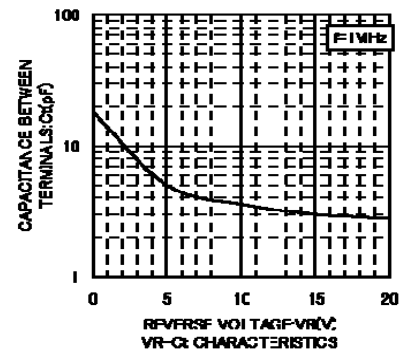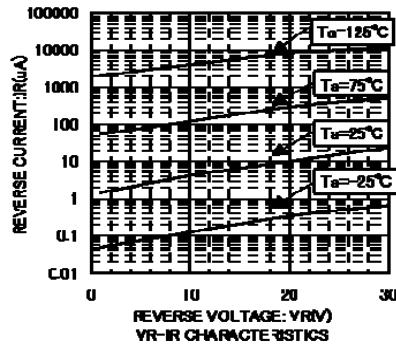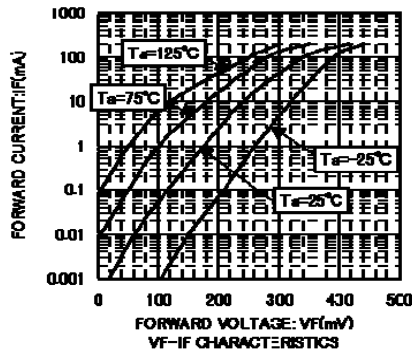


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

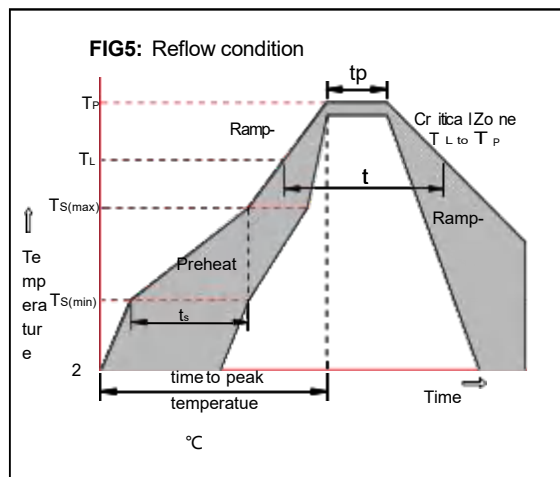


Package Dimensions & Suggested Pad Layout

SOD523


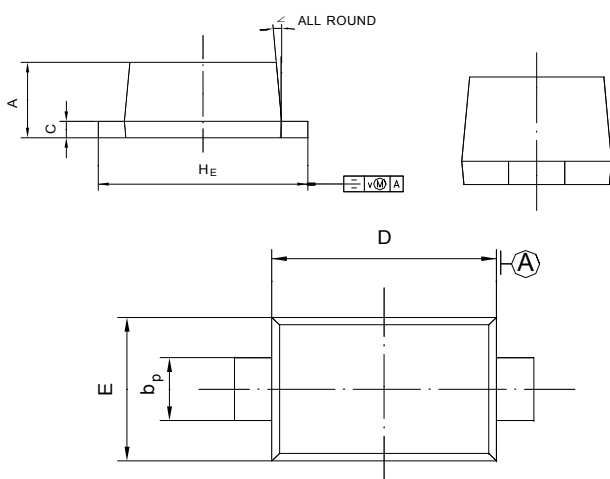


UNIT	A	b _p	C	D	E	H _E	V	∠
mm	0.70 0.50	0.40 0.20	0.14 0.05	1.30 1.10	0.90 0.75	1.70 1.50	0.1	5°

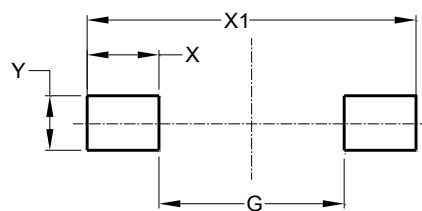

Dimensions	Value (in mm)
G	0.85
X	0.70
X1	2.25
Y	0.80

Tape & reel specification

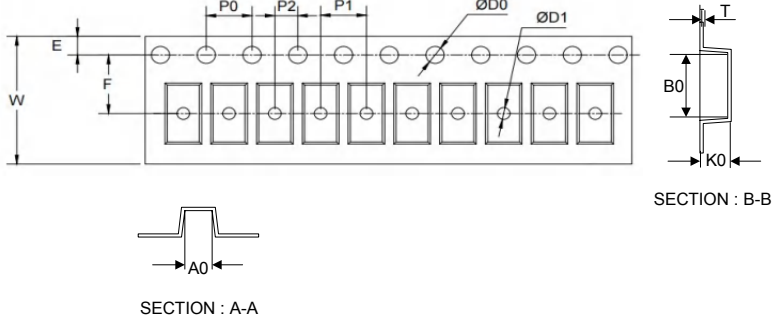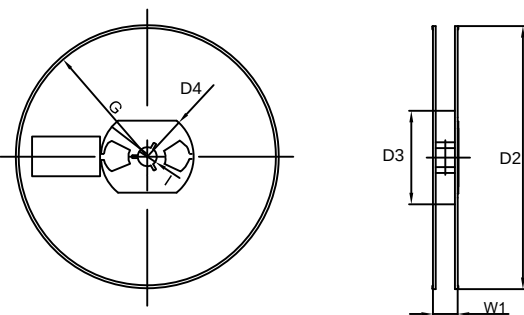Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	2.00±0.20
		P2	2.00±0.20
		D0	1.55±0.20
		D1	0.50±0.20
		E	1.55±0.25
		F	3.60±0.20
		W	8.00±0.20
		A0	1.30±0.20
		B0	2.35±0.20
		K0	0.95±0.20
		T	0.20±0.20
		D2	177.0±5.0
		D3	55Min.
7" Reel		D4	R24.6±2.0
		G	R82.0±2.0
		I	13.0±2.0
		W1	10.20±3.0
		Quantity: 3000PCS	