

FEATURES




High Current Capability
Low Forward Voltage Drop

MECHANICAL DATA

SOD-323 Small Outline Plastic Package
Polarity: Color band denotes cathode end
Epoxy UL: 94V-0
Mounting Position: Any



Marking: **B0520WS: SJ**
B0530WS: SE
B0540WS: SL



VOLTAGE RANGE

20.0 - 40.0 Volts

CURRENT

0.5 Ampere

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameters	Symbol	B0520WS	B0530WS	B0540WS	Unit
Maximum repetitive peak reverse voltage	VRRM	20	30	40	V
Maximum RMS voltage	VRMS	14	21	28	V
Maximum DC blocking voltage	VDC	20	30	40	V
Maximum average forward rectified current	IFM	0.5			A
Peak forward surge current 8.3 ms single half sine-wave	IFSM	5.5			A
Typical thermal resistance	RθJA	200			°C/W
Power Dissipation	PD	500			mW
Storage temperature range	TSTG	-50~+150			°C
Voltage rate of change	Dv/dt	1000			V/μS

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified).

Parameters	Symbol	Test conditions	B0520WS	B0530WS	B0540WS	Unit
Maximum forward voltage	VF	IF = 0.1A	0.360	0.390	---	V
		IF = 0.5A	0.420	0.470	0.510	
		IF = 1.0A	---	---	0.620	
Maximum reverse breakdown voltage	VR	IR=250uA	20	---	---	V
		IR=200uA	---	30	---	
		IR=100uA	---	---	40	
Maximum reverse current	IR	VR=10V	75	---	---	μA
		VR=15V	---	20	---	
		VR=20V	250	---	10	
		VR=30V	---	130	---	
		VR=40V	---	---	20	
Capacitance between terminals	CT	VR = 0V, f = 1MHz	---	---	170	pF

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL Forward Current Derating Curve

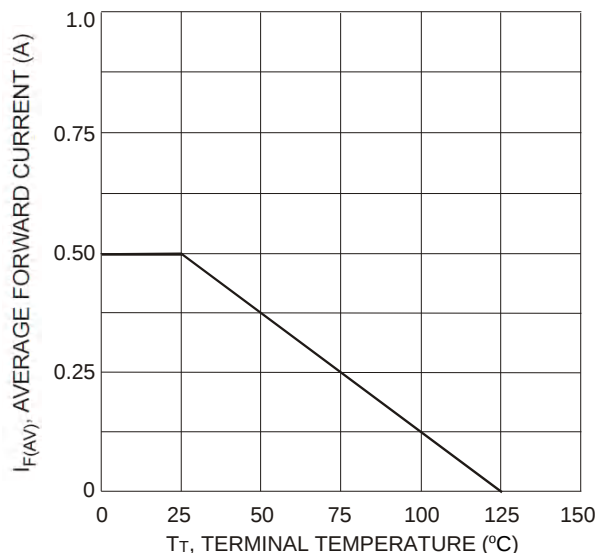


Fig. 2 Typical Forward Characteristics B0520WS/B0530WS

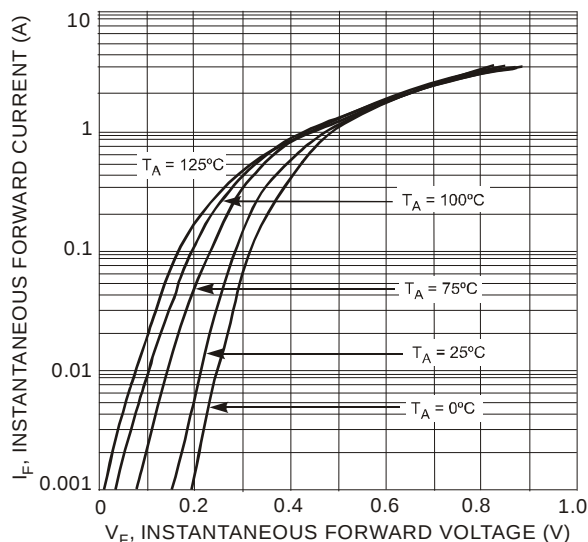


Fig. 3 Typical Forward Characteristics B0540WS

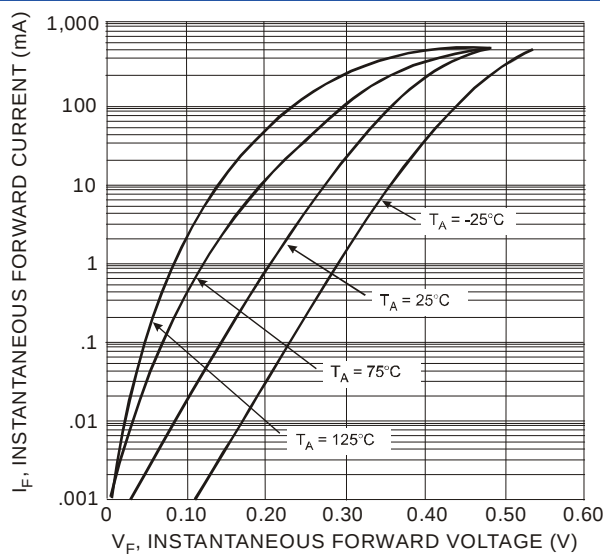


Fig. 4 Typical Reverse Characteristics B0520WS/B0530WS

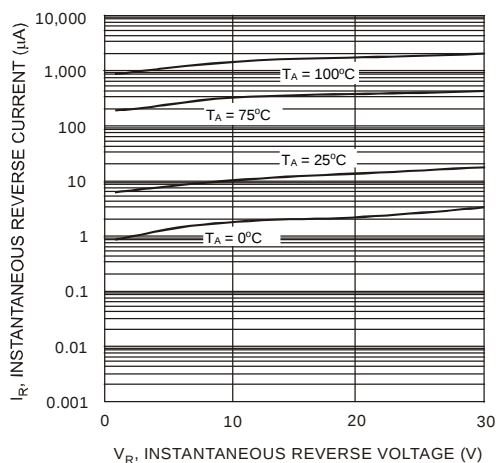


Fig. 5 Typical Reverse Characteristics B0540WS



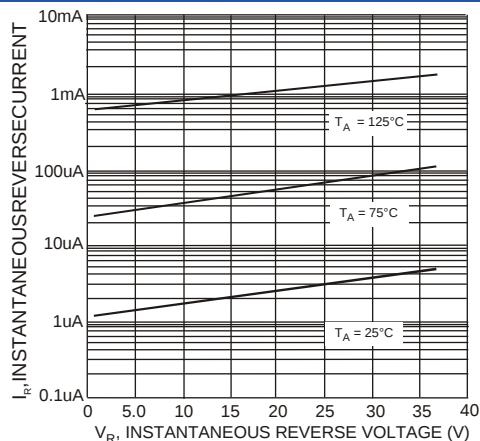


Fig. 6 Total Capacitance vs. Reverse Voltage

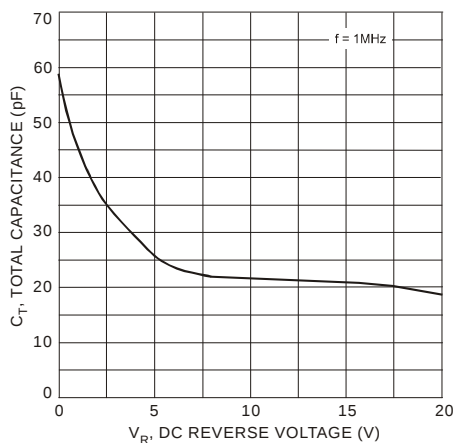


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

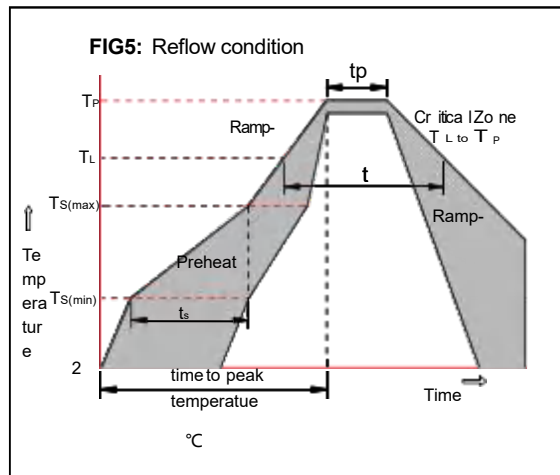


Package Dimensions & Suggested Pad Layout

SOD323

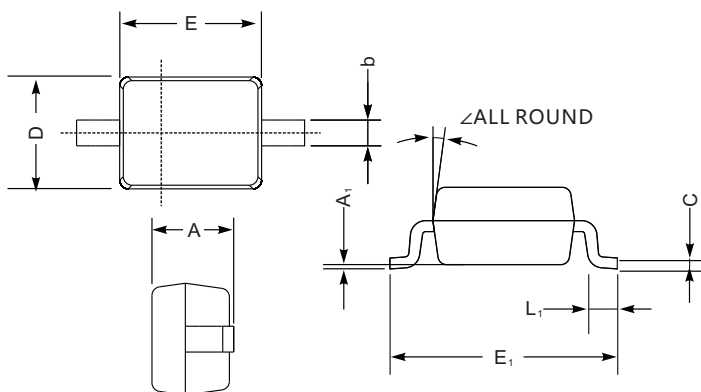



SOD-323 mechanical data

UNIT		A	C	D	E	E ₁	b	L ₁	A ₁	∠
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

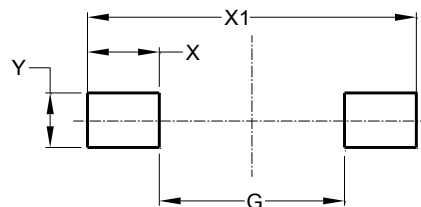

Dimensions	Value (in mm)
G	1.40
X	1.20
X1	3.80
Y	1.00

Tape & reel specification

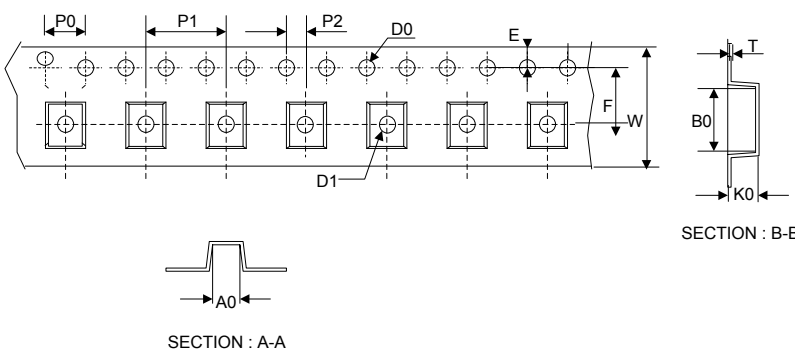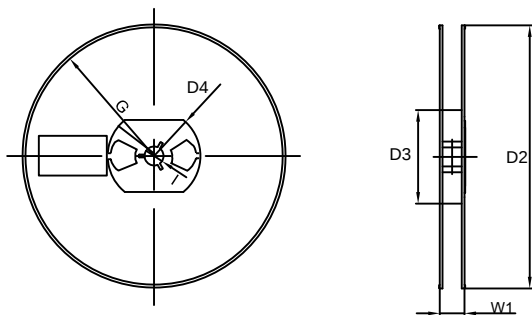Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.20
		D1	1.00±0.20
		E	1.55±0.25
		F	3.60±0.20
		W	8.00±0.20
		A0	2.00±0.20
		B0	3.25±0.20
		K0	1.35±0.20
		T	0.23±0.10
		D2	177.0±5.0
		D3	55Min.
7" Reel		D4	R24.6±2.0
		G	R82.0±2.0
		I	13.0±2.0
		W1	10.20±3.0
		Quantity: 3000PCS	