

FEATURES

- Low Forward Voltage Drop
- Fast Switching

VOLTAGE RANGE



30 Volts

CURRENT

0.2 Ampere



SOD-123







MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	30	V
Reverse Voltage	V_R	30	V
Forward Continuous Current	I_{FM}	200	mA
Repetitive Peak Forward Current at $t < 1$ s	I_{FRM}	500	mA
Non-repetitive Peak Forward Surge Current at $t < 10$ ms	I_{FSM}	0.8	A
Power Dissipation	P_{tot}	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500	°C/W
Operating and Storage Temperature Range	T_J, T_{Stg}	- 55 to + 125	°C

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu A$	$V_{(BR)R}$	30	-	V
Reverse Current at $V_R = 25$ V	I_R	-	500	nA
Forward Voltage at $I_F = 200$ mA at $I_F = 10$ mA at $I_F = 50$ mA at $I_F = 2$ mA at $I_F = 15$ mA	V_F	- - - 0.26 -	1 0.4 0.65 0.33 0.45	V V V V V
Total Capacitance at $V_R = 1$ V, $f = 1$ MHz	C_T	-	10	pF
Reverse Recovery Time at $I_F = I_R = 10$ mA, $I_{rr} = 0.1 \times I_R$, $R_L = 100 \Omega$	t_{rr}	-	5	ns

RATING AND CHARACTERISTIC CURVES

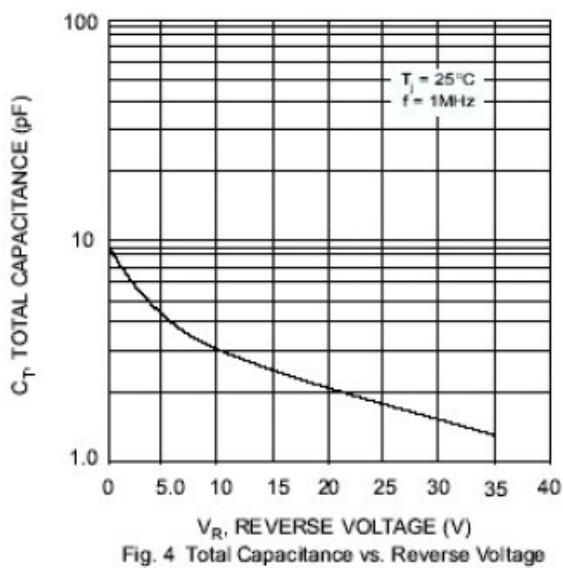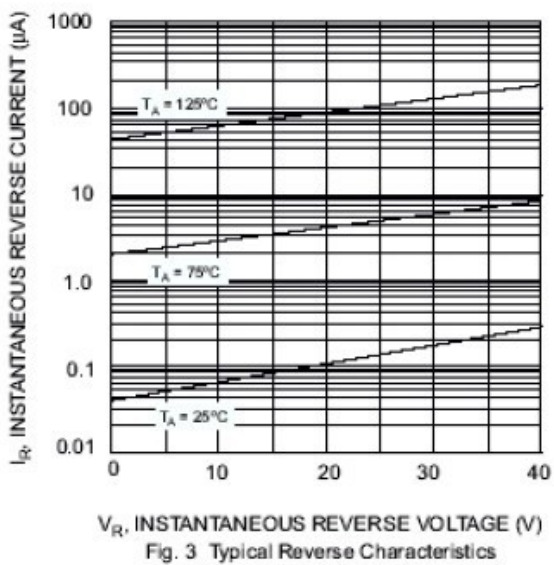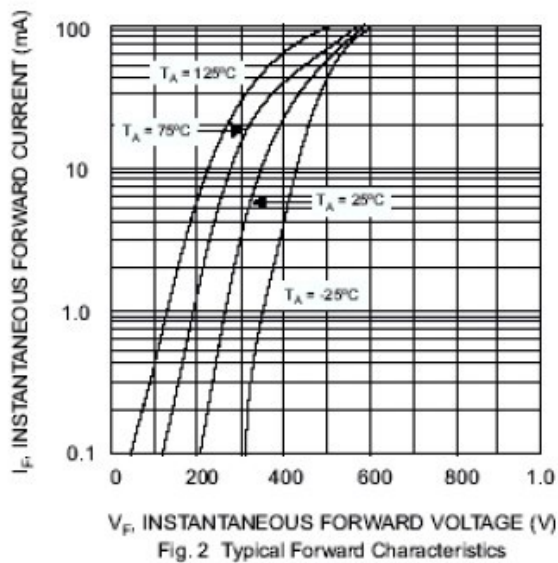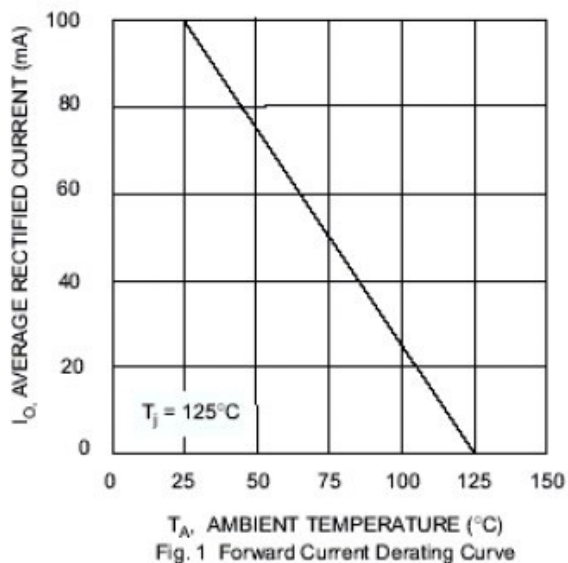



Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C



Package Dimensions & Suggested Pad Layout



SOD123

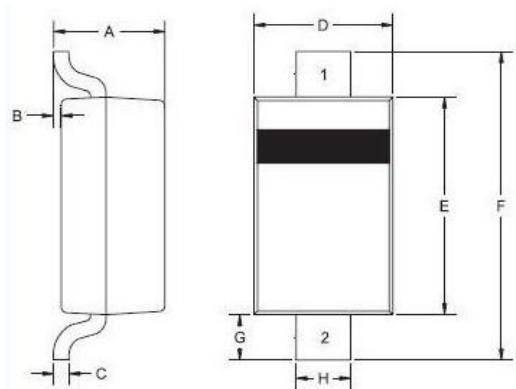

SOD123		
Dim	Min	Max
A	0.95	1.35
B	0.00	0.12
C	-	0.20
D	1.40	1.80
E	2.50	2.80
F	3.60	3.90
G	0.40	-
H	0.50	0.70
All Dimensions in mm		

Dimensions	Value (in mm)
G	2.20
X	1.20
X1	4.60
Y	1.20

Tape & reel specification

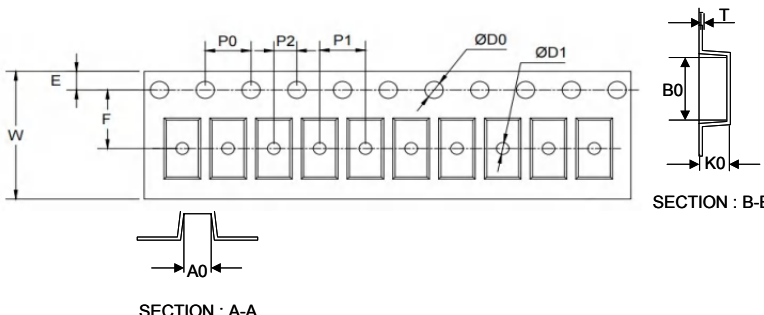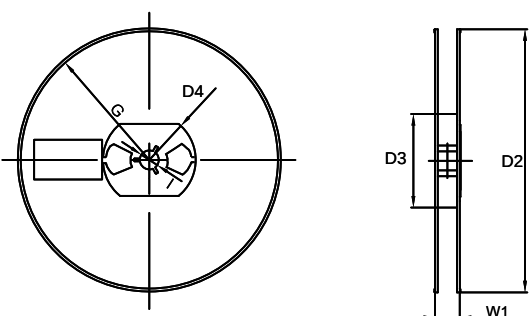Tape		Symbol	Dimension (mm)
 SECTION : A-A SECTION : B-B		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.10
		D1	1.00±0.20
		E	1.75±0.20
		F	3.60±0.20
		W	8.00±0.40
		A0	2.30±0.40
		B0	4.00±0.40
		K0	1.50±0.40
		T	0.23±0.10
		D2	177.0±3.0
		D3	55Min.
		D4	R24.0±3.0
7" Reel		G	R82.0±3.0
		I	13.0±2.0
		W1	11.0±3.0
		Quantity: 3000PCS	