

FEATURES

- Fast switching speed
- Ultra-small surface mount package
- For general purpose switching applications



VOLTAGE RANGE

85 Volts

CURRENT

0.2 Ampere

D4

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS



Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Repetitive Reverse Voltage	V_{RRM}	85	V
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Non-repetitive Peak Forward Surge Current Pulse Width = 1 s Pulse Width = 1 us	I_{FSM}	0.5 4	A
Power Dissipation	P_{tot}	250	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Electrical Characteristics ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Min.	Max.	Unit
Breakdown Voltage at $I_R = 5\ \mu\text{A}$ at $I_R = 100\ \mu\text{A}$	V_R	75 100	- -	V V
Forward Voltage at $I_F = 1\text{mA}$ $I_F = 10\text{mA}$ $I_F = 50\text{mA}$ $I_F = 150\text{mA}$	V_F	-	0.9 1 1.1 1.25	V
Reverse Current at $V_R = 20\text{V}$ at $V_R = 75\text{V}$	I_R	- -	25 1	nA μA
Diode Capacitance at $V_R = 0\text{V}$, $f = 1\text{MHz}$	C_{tot}	-	4	pF
Reverse Recovery Time at $I_{rr} = 0.1 \times I_R$, $I_F = I_R = 10\text{mA}$, $R_L = 100\ \Omega$	t_{rr}	-	3	ns

RATING AND CHARACTERISTIC CURVES

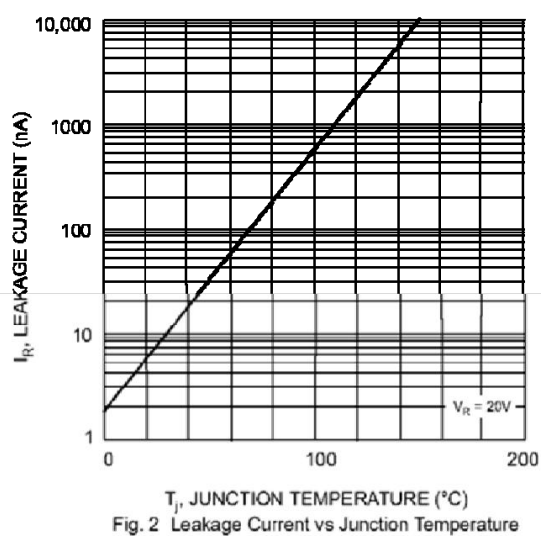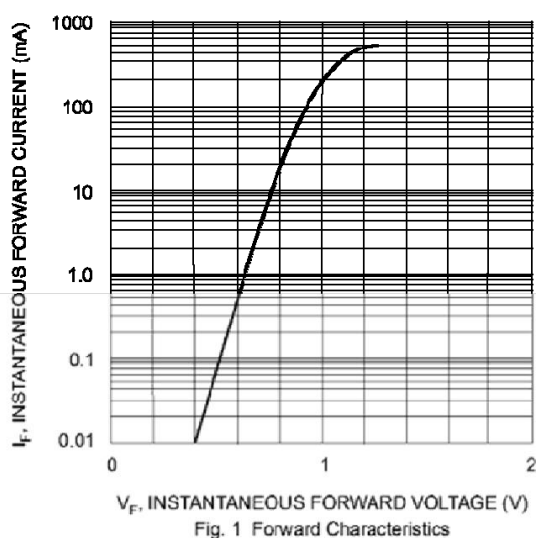


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

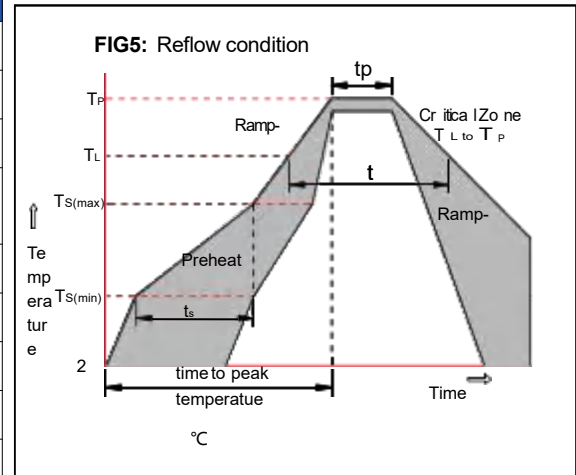


Package Dimensions & Suggested Pad Layout

SOD323

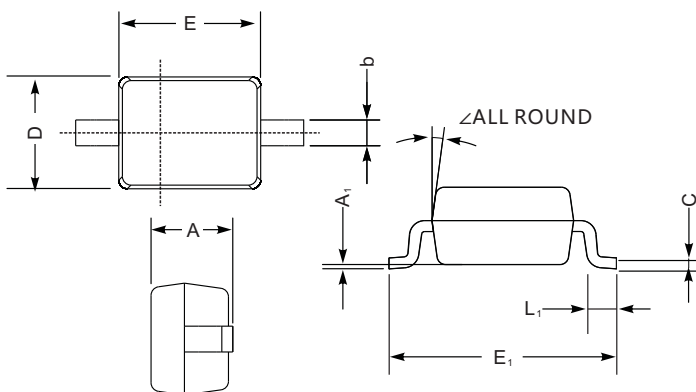



SOD-323 mechanical data

UNIT		A	C	D	E	E ₁	b	L ₁	A ₁	∠
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

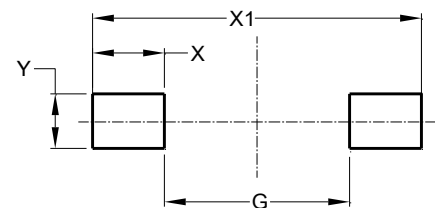

Dimensions	Value (in mm)
G	1.40
X	1.20
X1	3.80
Y	1.00

Tape & reel specification

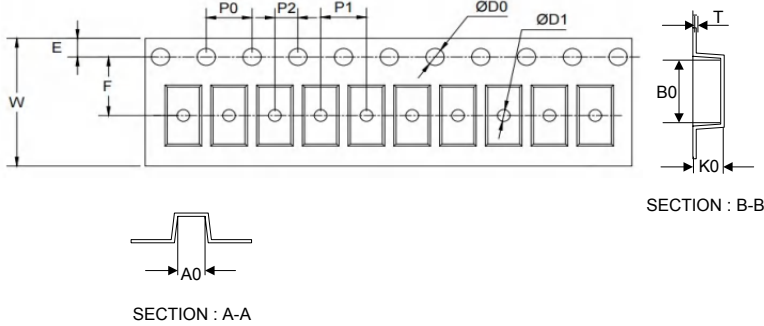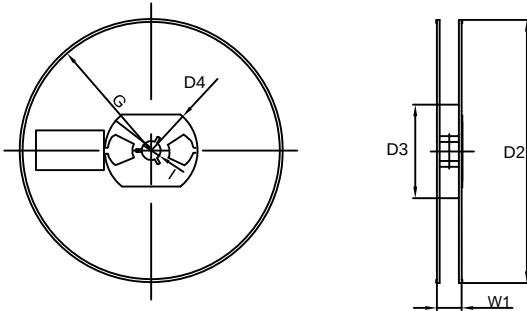Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.20
		D1	1.00±0.20
		E	1.55±0.25
		F	3.60±0.20
		W	8.00±0.20
		A0	2.00±0.20
		B0	3.25±0.20
		K0	1.35±0.20
		T	0.23±0.10
		D2	177.0±5.0
		D3	55Min.
		D4	R24.6±2.0
7" Reel		G	R82.0±2.0
		I	13.0±2.0
		W1	10.20±3.0
		Quantity: 3000PCS	