

FEATURES


- * High density cell design for low $R_{DS(ON)}$
- * Voltage controlled small signal switch
- * Rugged and reliable
- * High saturation current capability
- * ESD protected (2KV HBM)

V_{DSS} 60 V
 I_D 340 mA
 $R_{DS(ON)}$ 1.7 Ω


7002

SOT-23

1. GATE
2. SOURCE
3. DRAIN



Equivalent Circuit



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Value	Units
V_{DS}	Drain-Source voltage	60	V
V_{GS}	Gate-Source voltage	20	V
I_D	Drain Current	340	mA
P_D	Power Dissipation	0.35	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55-150	$^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	357	$^\circ\text{C/W}$

Electrical Characteristics


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static Characteristics						
Drain-Source Breakdown Voltage	V _{DS}	V _{GS} = 0V, I _D =250μA	60			V
Gate Threshold Voltage*	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250uA	1		2.5	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =48V,V _{GS} = 0V			1	μA
Gate –Source leakage current	I _{GSS1}	V _{GS} =±20V, V _{DS} = 0V			±10	μA
	I _{GSS2}	V _{GS} =±10V, V _{DS} = 0V			±200	nA
	I _{GSS3}	V _{GS} =±5V, V _{DS} = 0V			±100	nA
Drain-Source On-Resistance*	R _{DS(on)}	V _{GS} = 4.5V, I _D =200mA			5.0	Ω
		V _{GS} =10V,I _D =300mA		1.7	4.0	Ω
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =300mA			1.5	V
Recovered charge	Q _r	V _{GS} =0V,I _S =300mA,V _R =25V, dI _S /dt=-100A/μS		30		nC
Dynamic Characteristics**						
Input Capacitance	C _{iss}	V _{DS} =10V,V _{GS} =0V,f =1MHz			40	pF
Output Capacitance	C _{oss}				30	pF
Reverse Transfer Capacitance	C _{rss}				10	pF
Switching Characteristics**						
Turn-On Delay Time	t _{d(on)}	V _{GS} =10V,V _{DD} =50V,R _G =50Ω, R _{GS} =50Ω, R _L =250Ω			10	ns
Turn-Off Delay Time	t _{d(off)}				15	ns
Reverse recovery Time	t _{rr}	V _{GS} =0V,I _S =300mA,V _R =25V, dI _S /dt=-100A/μS		30		ns
GATE-SOURCE ZENER DIODE						
Gate-Source Breakdown Voltage	BV _{GSO}	I _{gs} =±1mA (Open Drain)	±21.5		±30	V

RATING AND CHARACTERISTIC CURVES


Output Characteristics

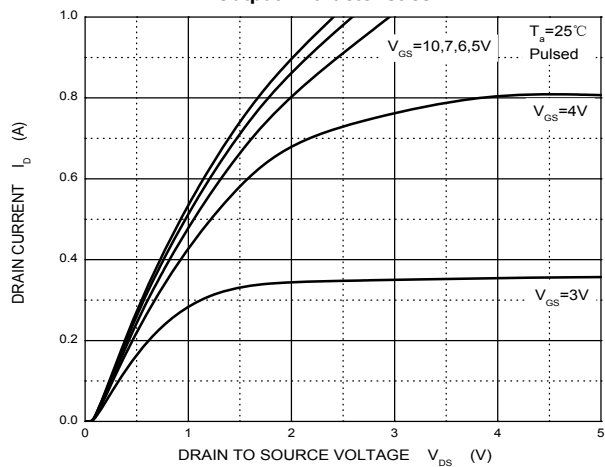


Transfer Characteristics

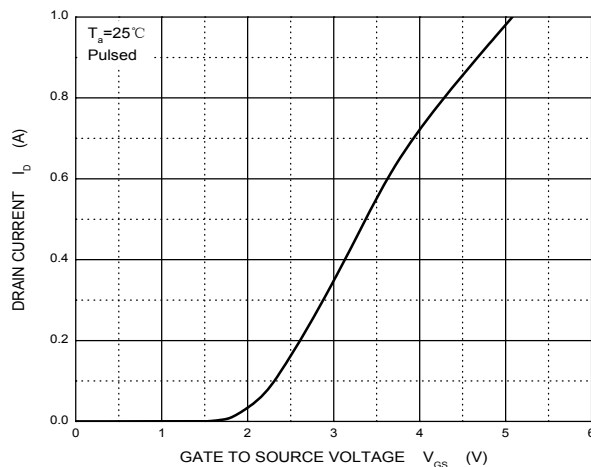


$R_{DS(ON)}$ — I_D

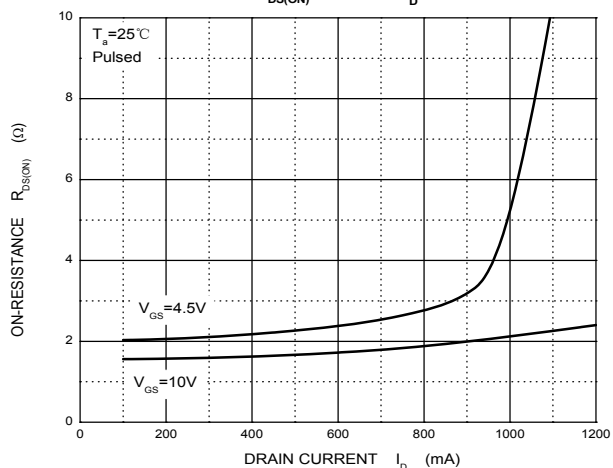

$R_{DS(ON)}$ — V_{GS}

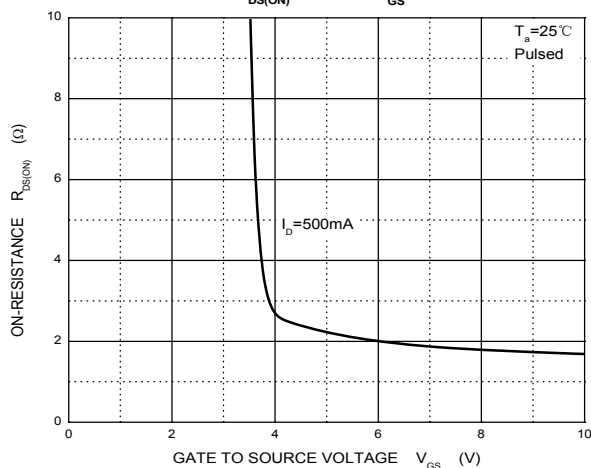


I_S — V_{SD}

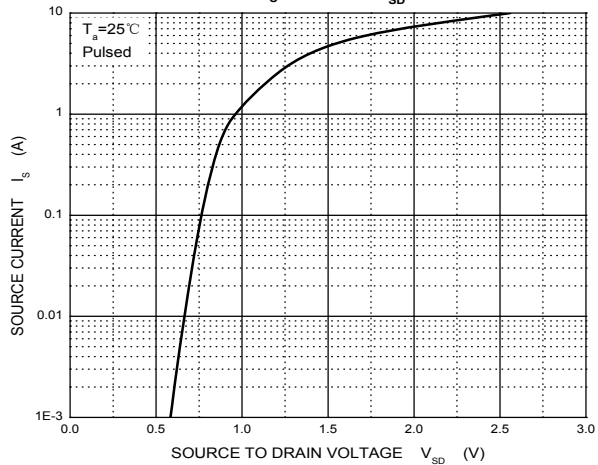



Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

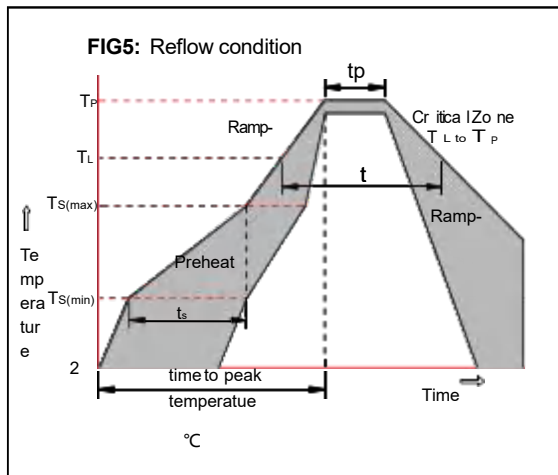

Package Dimensions & Suggested Pad Layout

SOT23

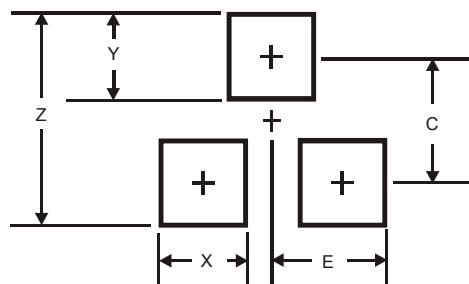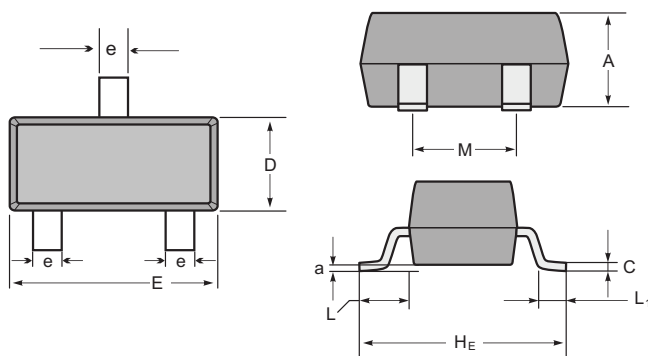

SOT-23 mechanical data

UNIT		A	C	D	E	H _E	e	M	L	L ₁	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

Tape & reel specification

Tape

7" Reel

Technical drawing of a tape reel. The top view shows a series of rectangular holes with dimensions P0, P1, and P2 between them. The overall width is W, and the height of the tape is E. The distance from the center of the holes to the edge is F. The diameter of the holes is ØD0 and ØD1. The side view shows the thickness of the tape is T, the distance from the center of the holes to the edge is B0, and the distance from the center of the holes to the edge is K0. The section A-A shows the width of the tape is A0.

Symbol	Dimension (mm)
P0	4.00±0.10
P1	4.00±0.10
P2	2.00±0.10
D0	1.55±0.10
D1	1.05±0.10
E	1.55±0.10
F	3.60±0.10
W	8.00±0.10
A0	3.80±0.20
B0	3.25±0.20
K0	1.45±0.10
T	0.25±0.05
D2	178.0±3.0
D3	55Min.
D4	R24.0±3.0
G	R82.0±3.0
I	13.0±2.0
W1	11.0±3.0

Quantity: 3000PCS