

General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

Features

30V, 300mA, $R_{DS(ON)} = 1.5\Omega @ V_{GS} = 10V$
Improved dv/dt capability
Fast switching
Green Device Available


Applications

Notebook
Load Switch
Battery Protection
Hand-held Instruments


V_{DSS} 30 V
 I_D 300 mA
 $R_{DS(ON)}$ 1.5 Ω



SOT- 23



Equivalent Circuit



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_A=25^\circ\text{C}$)	300	mA
	Drain Current – Continuous ($T_A=70^\circ\text{C}$)	240	mA
I_{DM}	Drain Current – Pulsed ¹	1.2	A
P_D	Power Dissipation ($T_C=25^\circ\text{C}$)	313	mW
	Power Dissipation – Derate above 25°C	2.5	mW/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 125	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	400	$^\circ\text{C/W}$

Electrical Characteristics ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	30	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.05	---	$V/^{\circ}\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=30V$, $V_{GS}=0V$, $T_J=50^{\circ}\text{C}$	---	---	100	nA
		$V_{DS}=30V$, $V_{GS}=0V$, $T_J=85^{\circ}\text{C}$	---	---	400	nA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 6	μA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=0.3A$	---	1.5	3	Ω
		$V_{GS}=4.5V$, $I_D=0.2A$	---	1.6	4	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	0.8	1.1	1.6	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	3	---	$\text{mV}/^{\circ}\text{C}$

Dynamic and switching Characteristics

C_{iss}	Input Capacitance	$V_{DS}=30V$, $V_{GS}=0V$, $F=1\text{MHz}$	---	23	46	pF
C_{oss}	Output Capacitance		---	16	32	
C_{rss}	Reverse Transfer Capacitance		---	10	20	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	300	mA
I_{SM}	Pulsed Source Current		---	---	600	mA
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=0.2A$, $T_J=25^{\circ}\text{C}$	---	---	1.2	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

RATING AND CHARACTERISTIC CURVES

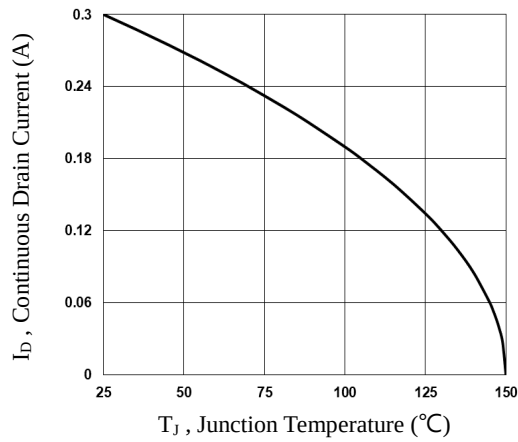


Fig.1 Continuous Drain Current vs. T_c

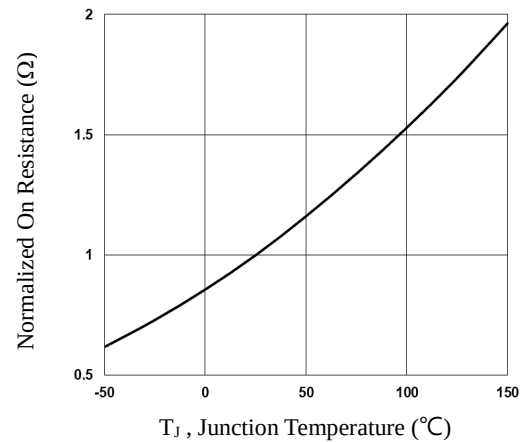


Fig.2 Normalized $R_{DS(on)}$ vs. T_J

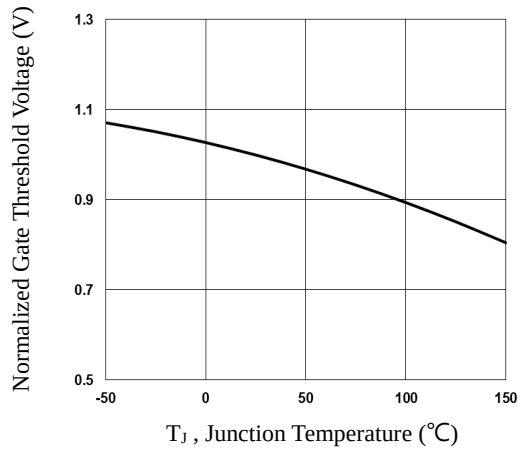


Fig.3 Normalized V_{th} vs. T_J

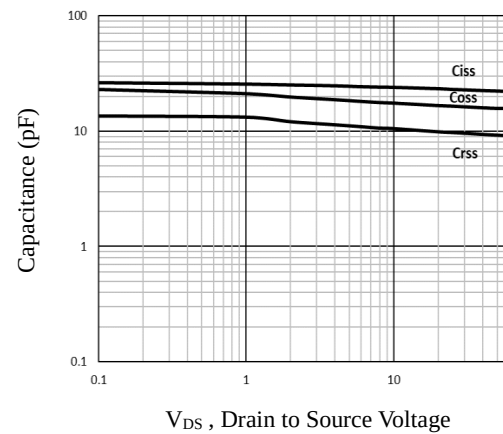


Fig.4 Capacitance Characteristics

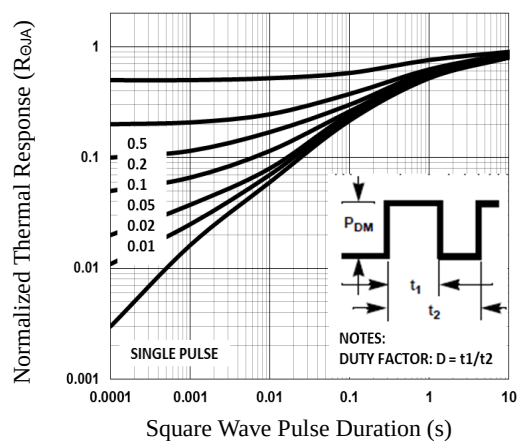


Fig.5 Normalized Transient Response

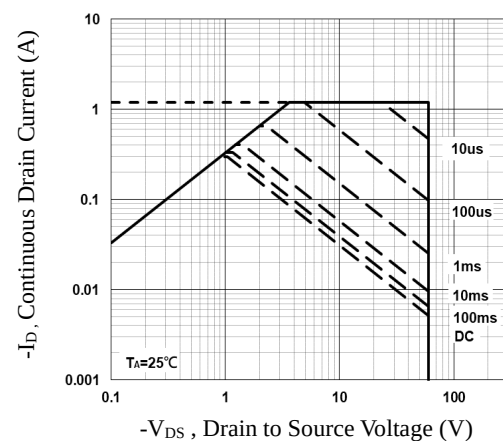


Fig.6 Maximum Safe Operation Area

RATING AND CHARACTERISTIC CURVES

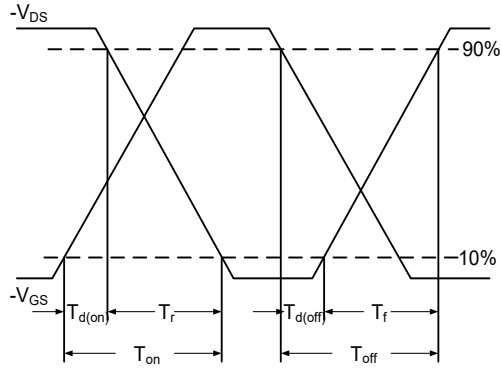


Fig.7 Switching Time Waveform


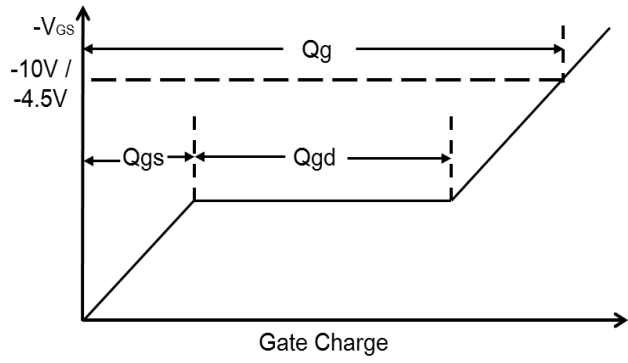


Fig.8 Gate Charge Waveform



Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

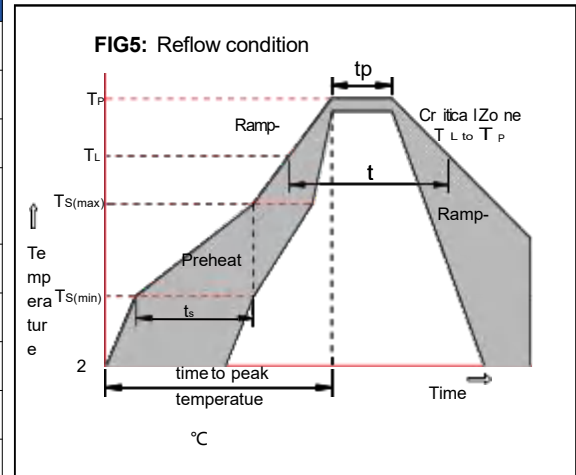

Package Dimensions & Suggested Pad Layout

SOT23

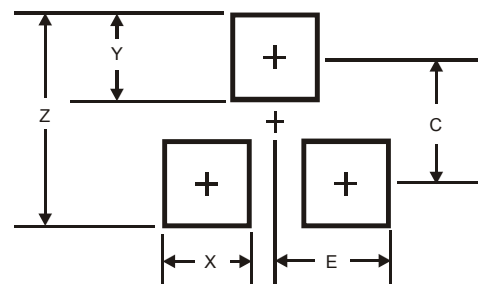
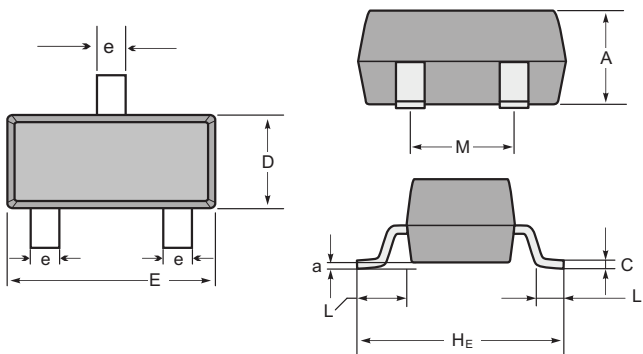


SOT-23 mechanical data

UNIT	A	C	D	E	H _E	e	M	L	L ₁	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7		0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)
	min	35	3	47	110	87	12	67		6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

Tape & reel specification

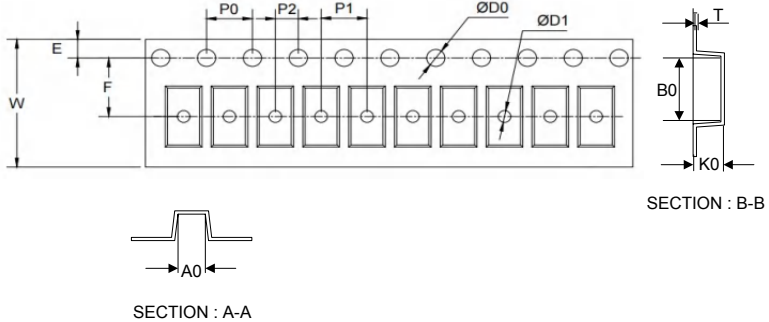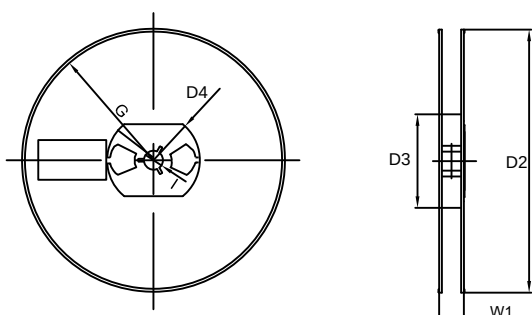Tape		Symbol	Dimension (mm)
		P0	4.00±0.10
		P1	4.00±0.10
		P2	2.00±0.10
		D0	1.55±0.10
		D1	1.05±0.10
		E	1.55±0.10
		F	3.60±0.10
		W	8.00±0.10
		A0	3.80±0.20
		B0	3.25±0.20
		K0	1.45±0.10
		T	0.25±0.05
		D2	178.0±3.0
		D3	55Min.
		D4	R24.0±3.0
7" Reel		G	R82.0±3.0
		I	13.0±2.0
		W1	11.0±3.0
		Quantity: 3000PCS	