


FEATURES

Complementary to MMBT5401W

Ideal for medium power amplification and switching

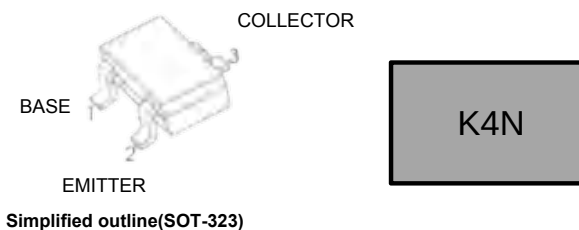

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS









Maximum ratings (T =25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	180	V
V _{CEO}	Collector-Emitter Voltage	160	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current -Continuous	0.6	A
P _C	Collector Power Dissipation	300	mW
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55-150	°C

Electrical Characteristics


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	180			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=1mA, I_B=0$	160			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=120V, I_E=0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$			50	nA
DC current gain	h_{FE1}^*	$V_{CE}=5V, I_C=1mA$	80			
	h_{FE2}^*	$V_{CE}=5V, I_C=10mA$	100		300	
	h_{FE3}^*	$V_{CE}=5V, I_C=50mA$	50			
Collector-emitter saturation voltage	V_{CEsat}^*	$I_C=10mA, I_B=1mA$			0.15	V
		$I_C=50mA, I_B=5mA$			0.2	
Base-emitter saturation voltage	V_{BEsat}^*	$I_C=10mA, I_B=1mA$			1	V
		$I_C=50mA, I_B=5mA$			1	
Transition frequency	f_T	$V_{CE}=10V, I_C=10mA, f=100MHz$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$			6	pF
Input capacitance	C_{ib}	$V_{BE}=0.5V, I_C=0, f=1MHz$			20	pF
Noise figure	NF	$V_{CE}=5V, I_C=0.25mA, f=10Hz \text{ to } 15.7KHz, R_s=1k\Omega$			8	dB

RATING AND CHARACTERISTIC CURVES

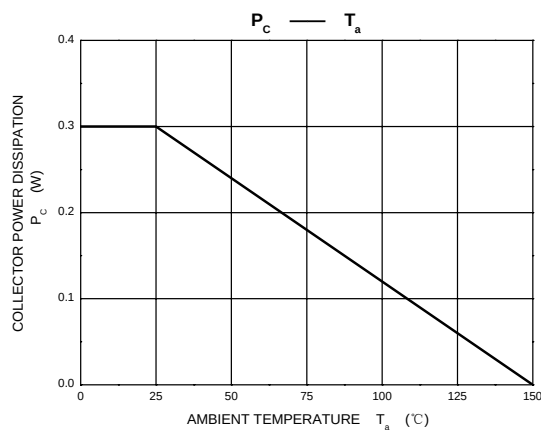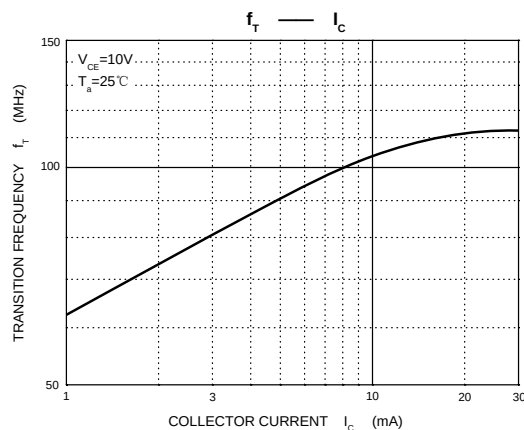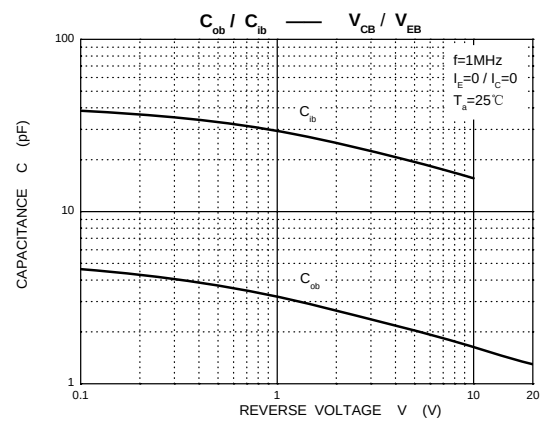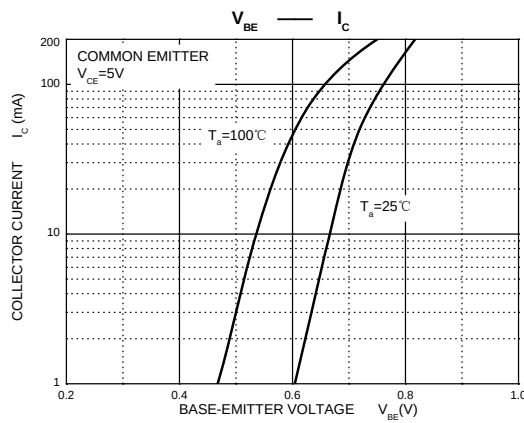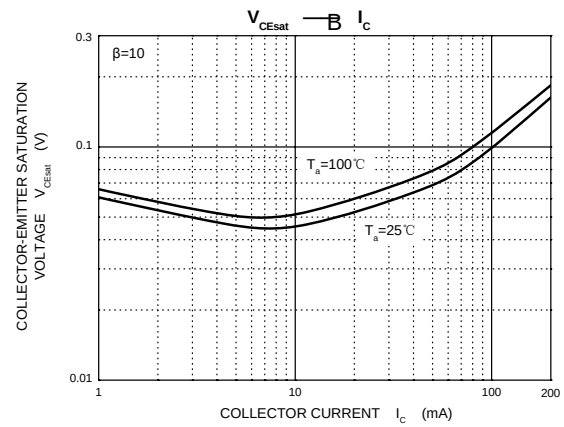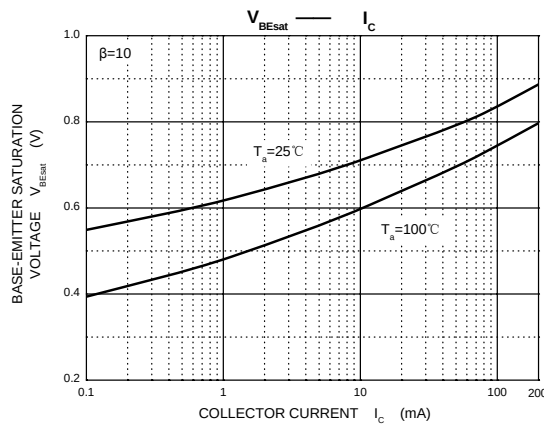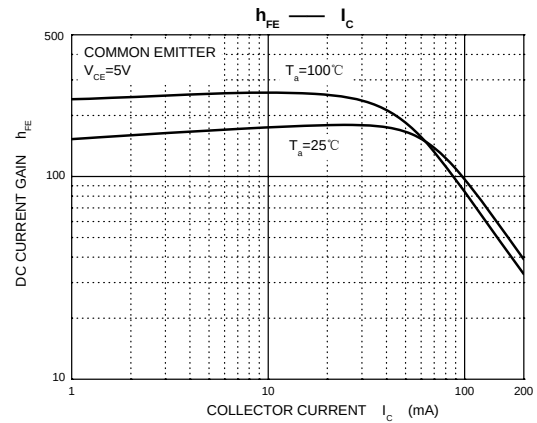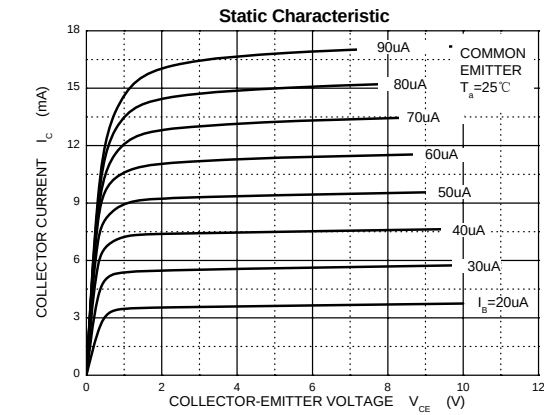


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

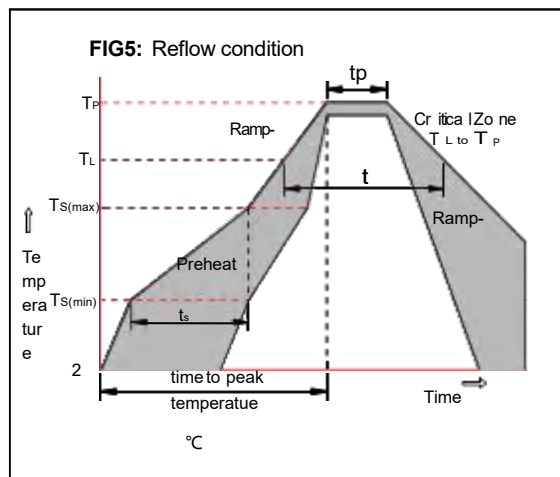


Package Dimensions & Suggested Pad Layout

SOT-323

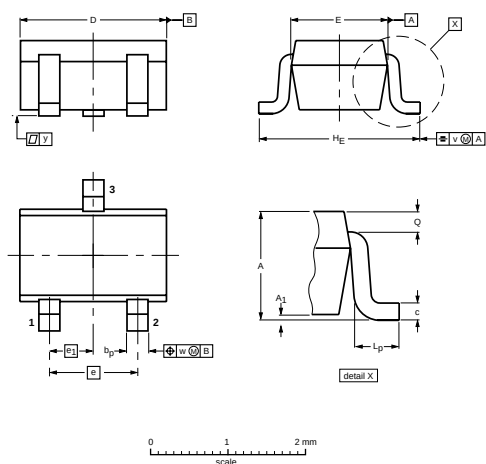



DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2



Dimensions	Value (in mm)
C	1.30
G	2.00
X	0.90
Y	0.65

Tape & reel specification

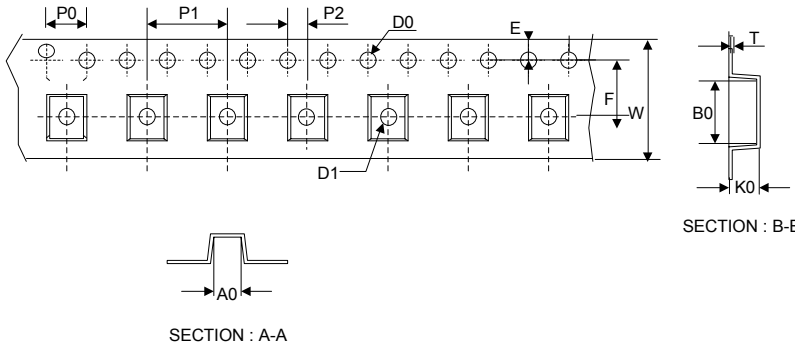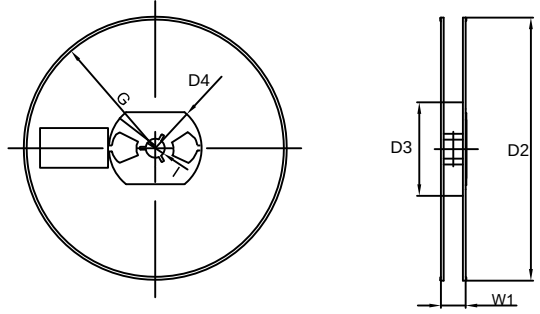Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.20
		D1	1.00±0.20
		E	1.55±0.25
		F	3.60±0.20
		W	8.00±0.20
		A0	2.50±0.20
		B0	2.60±0.20
		K0	1.40±0.20
		T	0.20±0.20
		D2	177.0±5.0
		D3	55Min.
		D4	R24.6±2.0
7" Reel		G	R82.0±2.0
		I	13.0±2.0
		W1	10.20±3.0
		Quantity: 3000PCS	