

Features



100Watts peak pulse power ($t_p = 8/20\mu s$)
Tiny SOT-523 package
Solid-state silicon-avalanche technology
Low clamping voltage
Low leakage current
Low capacitance ($C_j = 0.65pF$ typ.)
Protection one data/power line to:
IEC 61000-4-2 $\pm 20kV$ contact $\pm 20kV$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 4A (8/20 μs)

Mechanical Data

SOT-523 package
Molding compound flammability rating: UL 94V-0
Packaging: Tape and Reel
RoHS/WEEE Compliant

Applications

Microprocessor based equipment
Personal Digital Assistants (PDA's)
Notebooks, Desktops, and Servers
Portable Instrumentation
Pagers Peripherals

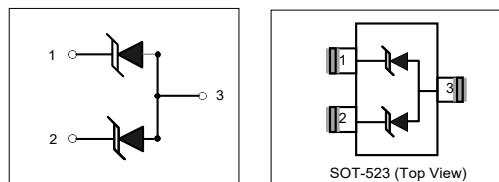

Schematic & PIN Configuration

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	50	Watts
Peak Pulse Current ($t_p = 8/20\mu s$) (note1)	I_{pp}	4	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	20 20	kV
Lead Soldering Temperature	T_L	260(10seconds)	$^{\circ}C$
Junction Temperature	T_J	-55 to + 125	$^{\circ}C$
Storage Temperature	T_{stg}	-55 to + 125	$^{\circ}C$


Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6.0			V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25^\circ C$			1	μA
Clamping Voltage	V_C	$I_{PP}=4A, t_p=8/20\mu s$		13		V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$ PIN1 to PIN2		0.65		pF
		$V_R = 0V, f = 1MHz$ PIN1/2 to PIN3		0.65		

Electrical Parameters (TA = 25°C unless otherwise noted)

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current

Note: 8/20 μs pulse waveform.

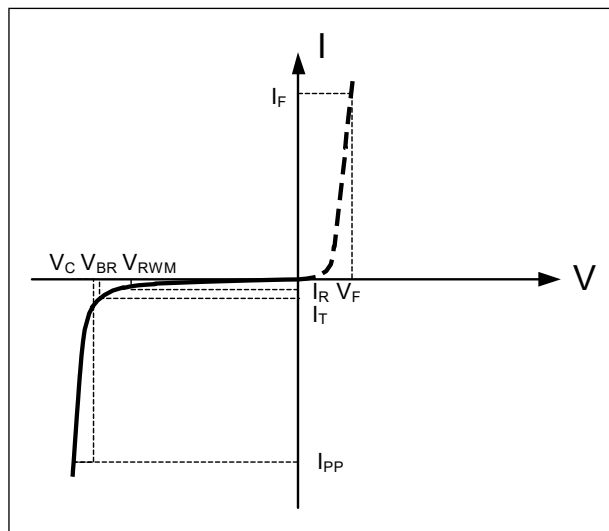

RATING AND CHARACTERISTIC CURVES

Figure 1: Peak Pulse Power vs. Pulse Time

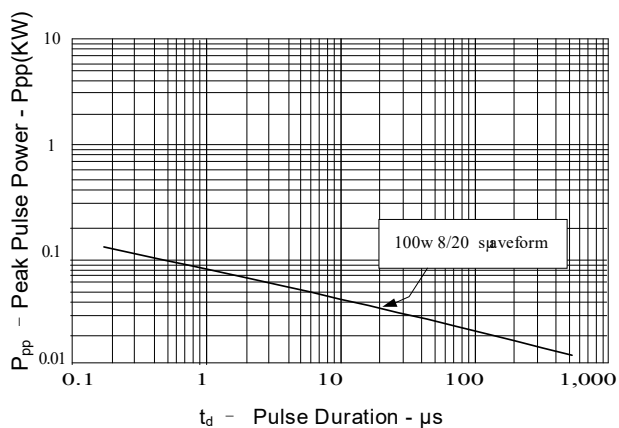


Figure 2: Power Derating Curve

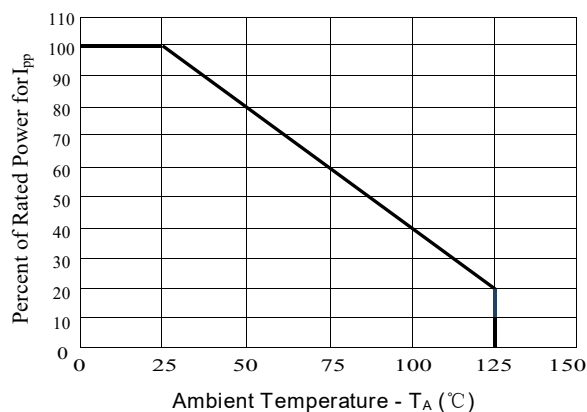


Figure3: Pulse Waveform



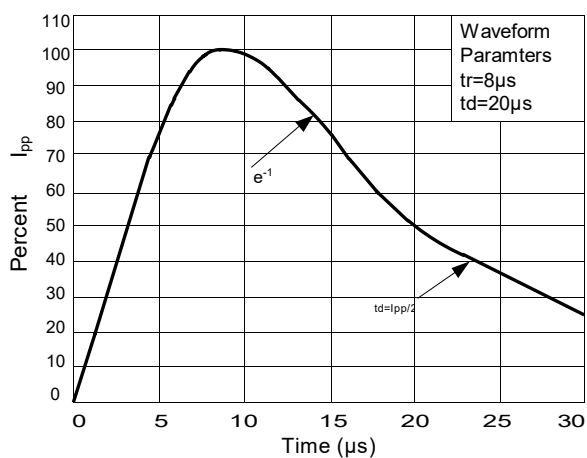


Figure 4: Clamping Voltage vs. Ipp

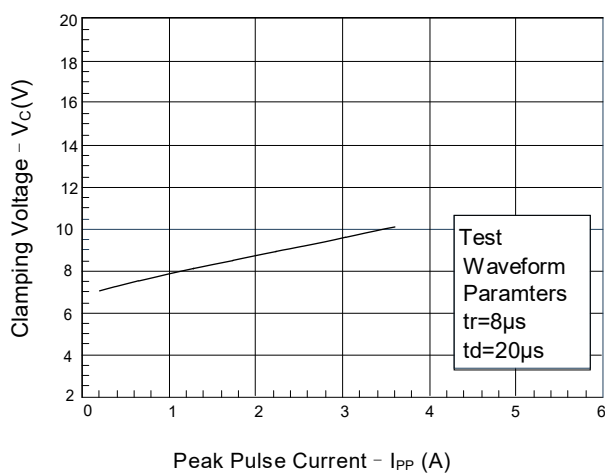

Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

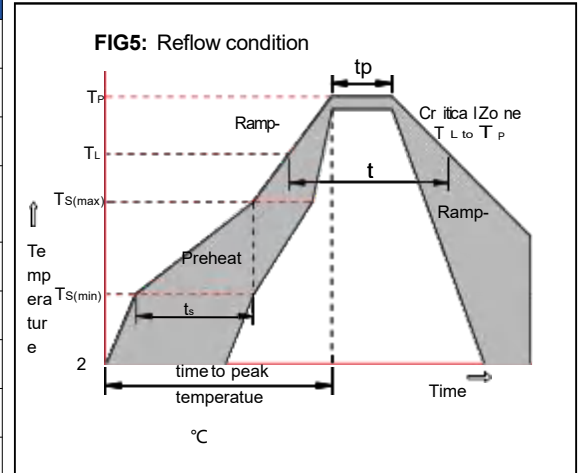


Package Dimensions & Suggested Pad Layout

SOT-523



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

Dimensions in inches and (millimeters)



Dimensions	Value (in mm)
C	1.00
G	0.45
X	0.70
X1	1.40
X2	0.70
Y	0.60

Tape & reel specification

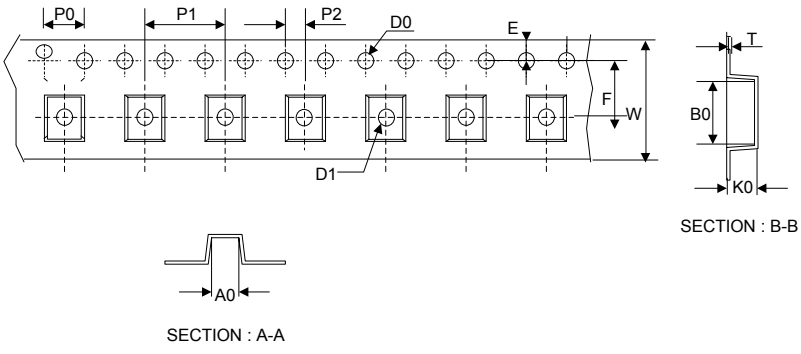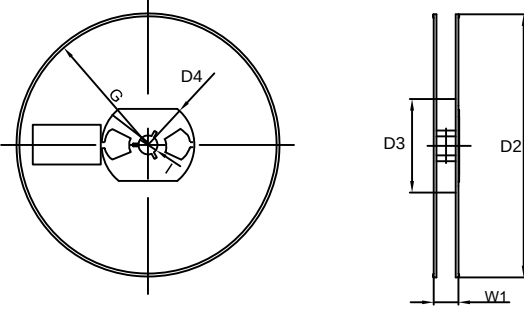Tape		Symbol	Dimension (mm)
		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.20
		D1	0.65±0.20
		E	1.55±0.25
		F	3.60±0.20
		W	8.00±0.20
		A0	2.10±0.20
		B0	2.20±0.20
		K0	1.10±0.20
		T	0.20±0.20
		D2	177.0±5.0
		D3	55Min.
		D4	R24.6±2.0
7" Reel		G	R82.0±2.0
		I	13.0±2.0
		W1	10.20±3.0
		Quantity: 3000PCS	