




## FEATURES

- Complementary to MMBT5551
- Ideal for Medium Power Amplification and Switching

### SOT-23



- 1.BASE  
2.EMITTER  
3.COLLECTOR

### Marking

Type number	Marking code
MMBT5401	2L

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

### MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector–Base Voltage	$V_{CBO}$	-160	V
Collector–Emitter Voltage	$V_{CEO}$	-150	V
Emitter–Base Voltage	$V_{EBO}$	-5	V
Collector Current — Continuous	$I_C$	-0.6	A
Collector Dissipation	$P_C$	0.3	W
Thermal Resistance From Junction To Ambient	$R_{thJA}$	416	°C/W
Operation Junction and Storage Temperature Range	$T_J, T_{stg}$	-55~+150	°C









### CLASSIFICATION OF $h_{FE(1)}$

RANK	L	H
RANGE	100-200	200-300

ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted.)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-160			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -1\text{ mA}, I_B = 0$	-150			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -120V, I_E = 0$			-0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -4V, I_C = 0$			-0.1	$\mu A$
DC current gain	$h_{FE1}$	$V_{CE} = -5V, I_C = -1\text{ mA}$	80			
	$h_{FE2}$	$V_{CE} = -5V, I_C = -10\text{ mA}$	100		300	
	$h_{FE3}$	$V_{CE} = -5V, I_C = -50\text{ mA}$	50			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = -10\text{ mA}, I_B = -1\text{ mA}$			-0.2	V
	$V_{CE(sat)2}$	$I_C = -50\text{ mA}, I_B = -5\text{ mA}$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = -10\text{ mA}, I_B = -1\text{ mA}$			-1	V
	$V_{BE(sat)2}$	$I_C = -50\text{ mA}, I_B = -5\text{ mA}$			-1	V
Transition frequency	$f_T$	$V_{CE} = -25V, I_C = -10\text{ mA}, f = 30\text{ MHz}$	100			MHZ

**RATING AND CHARACTERISTIC CURVES**

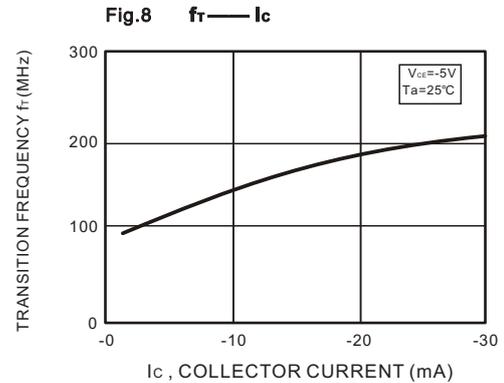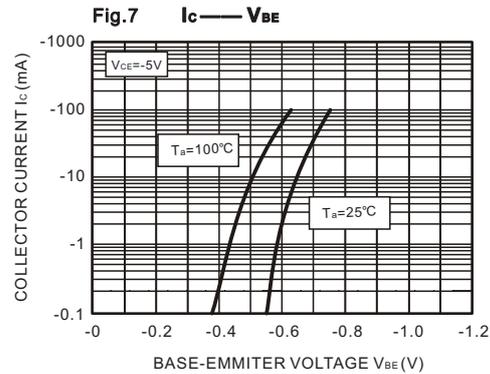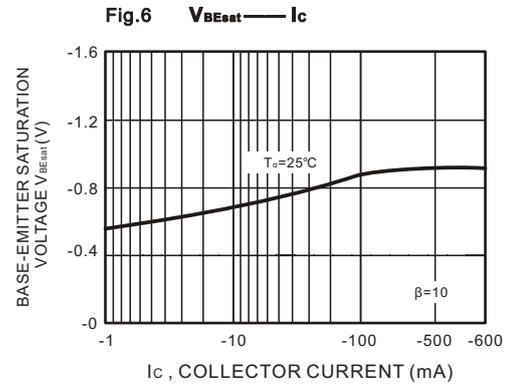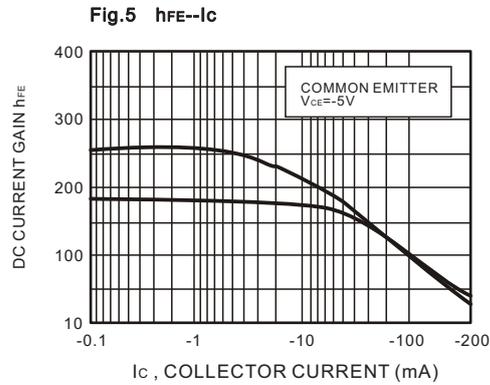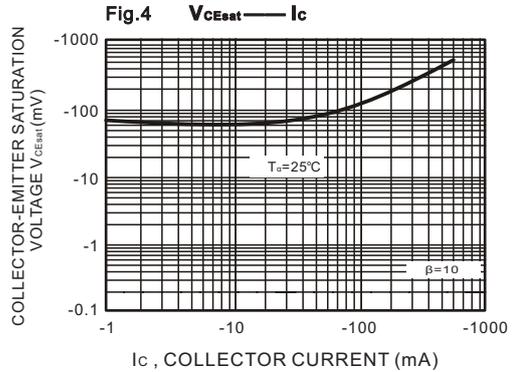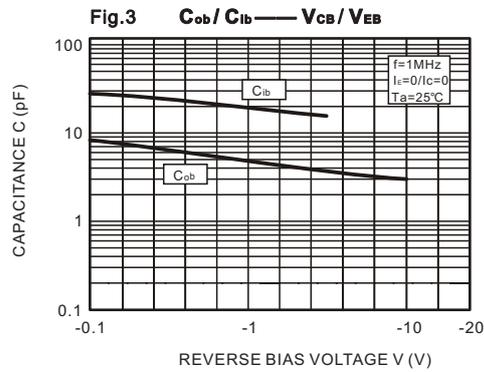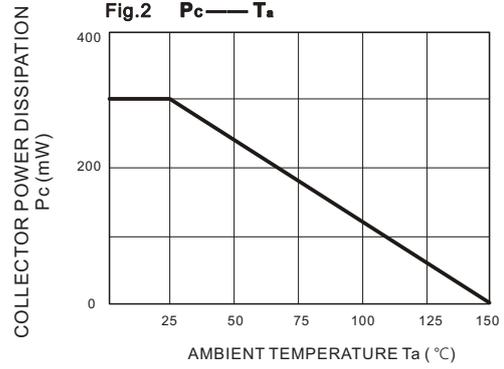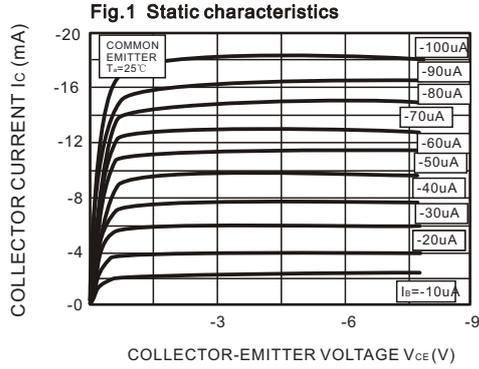



**Soldering parameters**

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquid us)	+217°C
	-Temperature( $t_L$ )	60-150 secs.
Peak Temp ( $T_P$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp ( $T_P$ )		8 min. Max
Do not exceed		+260°C

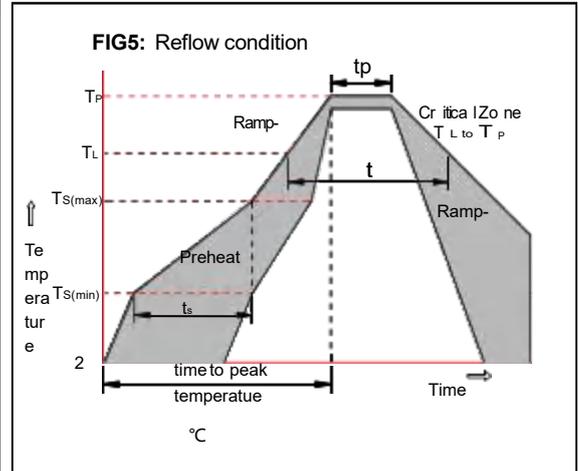

**Package Dimensions & Suggested Pad Layout**

**SOT23**

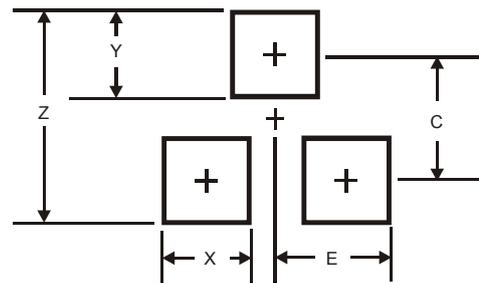
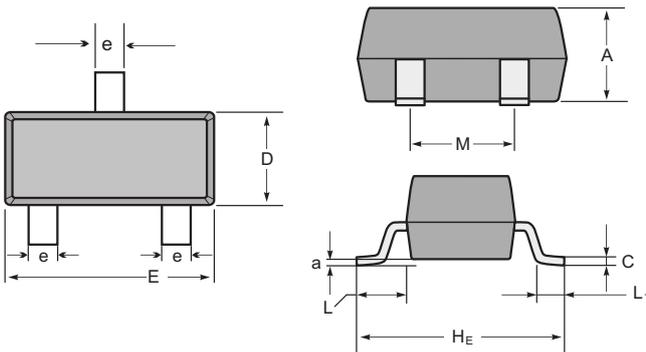


**SOT-23 mechanical data**

UNIT	A	C	D	E	He	e	M	L	L1	a	
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

Tape & reel specification

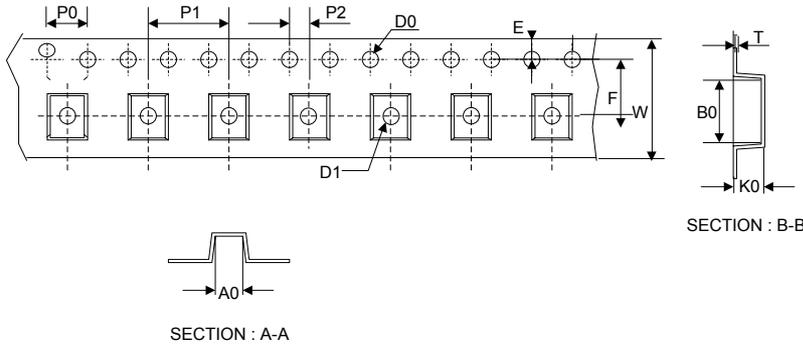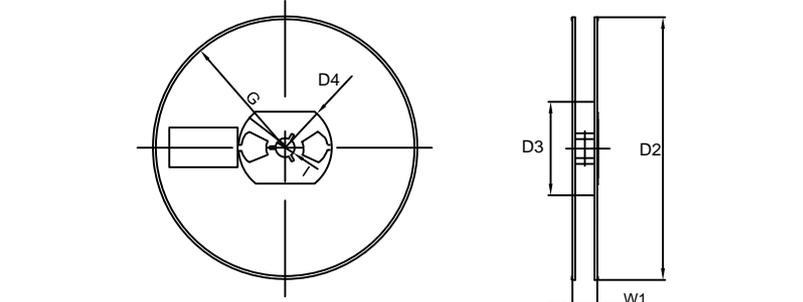Tape	Symbol	Dimension (mm)
	P0	4.00±0.10
	P1	4.00±0.10
	P2	2.00±0.10
	D0	1.55±0.10
	D1	1.05±0.10
	E	1.55±0.10
	F	3.60±0.10
	W	8.00±0.10
	A0	3.80±0.20
	B0	3.25±0.20
	K0	1.45±0.10
	T	0.25±0.05
	<p>7" Reel</p> 	D2
D3		55Min.
D4		R24.0±3.0
G		R82.0±3.0
I		13.0±2.0
W1		11.0±3.0
Quantity: 3000PCS		