

Features

55V, 300mA, $R_{DS(ON)} = 1.2\Omega @ V_{GS} = 10V$

Improved dv/dt capability

Fast switching

Green Device Available

V_{DSS} 55 V
 I_D 300 mA
 $R_{DS(ON)}$ 1.2 Ω

K38J2


Applications

Notebook

Load Switch

Battery Protection

Hand-held Instruments

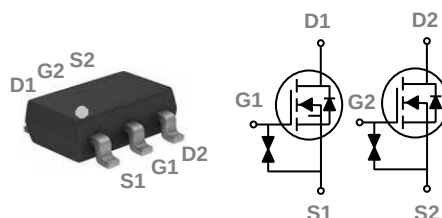

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	55	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_A = 25^\circ\text{C}$)	300	mA
	Drain Current – Continuous ($T_A = 70^\circ\text{C}$)	240	mA
I_{DM}	Drain Current – Pulsed ¹	1.2	A
P_D	Power Dissipation ($T_A = 25^\circ\text{C}$)	313	mW
	Power Dissipation – Derate above 25°C	2.5	mW/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	450	$^\circ\text{C/W}$

Electrical Characteristics ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	55	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.04	---	$V/^{\circ}\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=55V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 10	μA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=0.3A$	---	1.2	1.5	Ω
		$V_{GS}=4.5V$, $I_D=0.2A$	---	1.3	2.2	Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	0.8	1.1	1.6	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	-4	---	$\text{mV}/^{\circ}\text{C}$
g_{fs}	Forward Transconductance	$V_{DS}=10V$, $I_D=0.1A$	---	0.24	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{2, 3}	$V_{DS}=55V$, $V_{GS}=10V$, $I_D=0.2A$	---	1.1	---	nC
Q_{gs}	Gate-Source Charge ^{2, 3}		---	0.1	---	
Q_{gd}	Gate-Drain Charge ^{2, 3}		---	0.23	---	
$T_{d(on)}$	Turn-On Delay Time ^{2, 3}	$V_{DD}=55V$, $V_{GS}=10V$, $R_G=6\Omega$ $I_D=0.2A$	---	3	---	ns
T_r	Rise Time ^{2, 3}		---	5	---	
$T_{d(off)}$	Turn-Off Delay Time ^{2, 3}		---	14	---	
T_f	Fall Time ^{2, 3}		---	9	---	
C_{iss}	Input Capacitance	$V_{DS}=10V$, $V_{GS}=0V$, $F=1\text{MHz}$	---	30.6	---	pF
C_{oss}	Output Capacitance		---	5.5	---	
C_{rss}	Reverse Transfer Capacitance		---	4	---	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	0.3	A
I_{SM}	Pulsed Source Current		---	---	0.6	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=1A$, $T_J=25^{\circ}\text{C}$	---	---	1.4	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

RATING AND CHARACTERISTIC CURVES

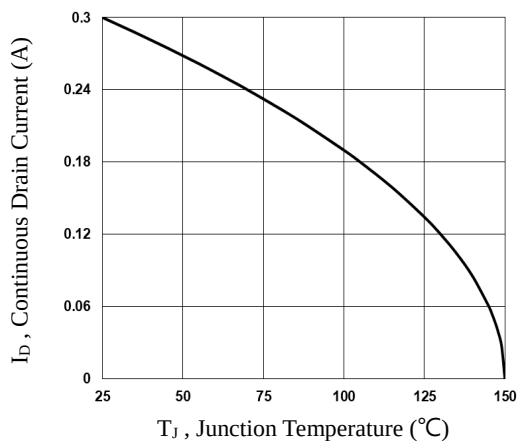


Fig.1 Continuous Drain Current vs. T_J

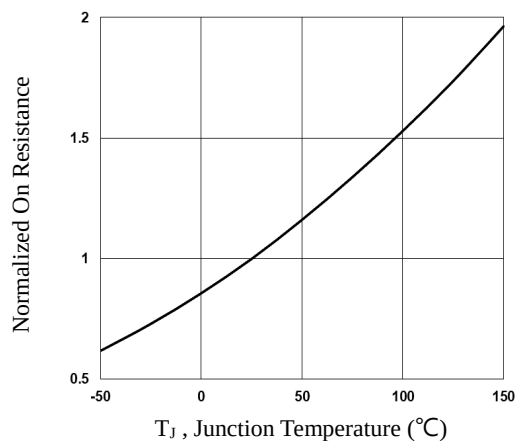


Fig.2 Normalized $R_{DS(on)}$ vs. T_J

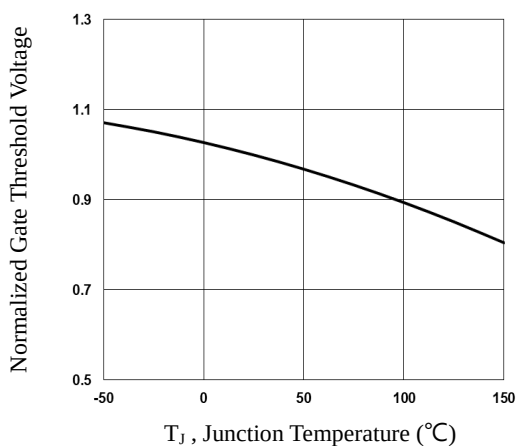


Fig.3 Normalized V_{th} vs. T_J

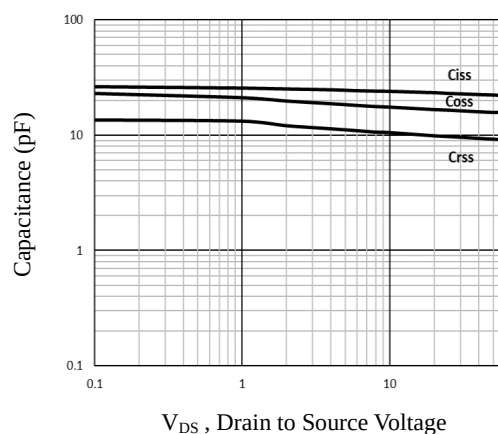


Fig.4 Capacitance Characteristics

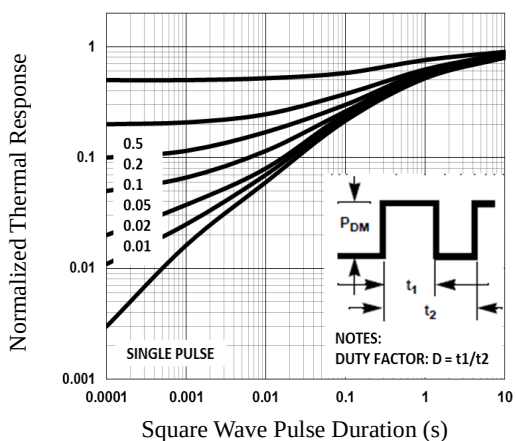


Fig.5 Normalized Transient Response

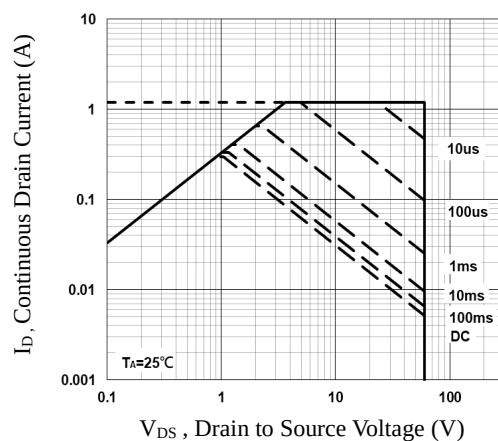


Fig.6 Maximum Safe Operation Area

RATING AND CHARACTERISTIC CURVES

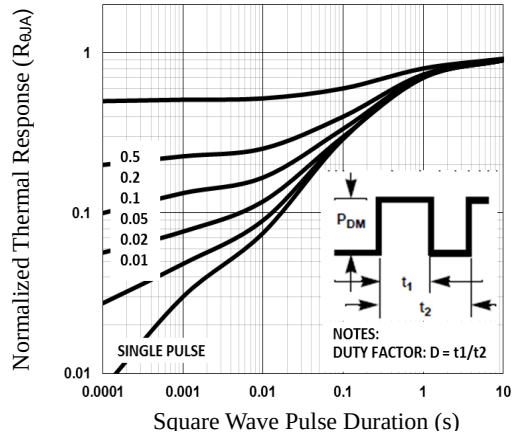


Fig.7 Normalized Transient Impedance

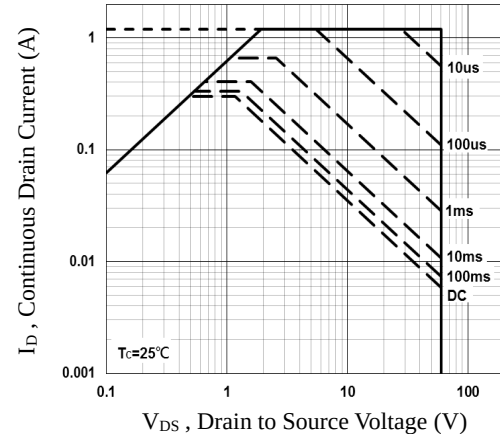


Fig.8 Maximum Safe Operation Area


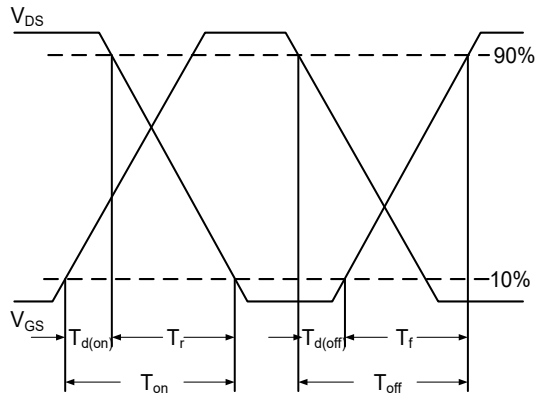


Fig.9 Switching Time Waveform



Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

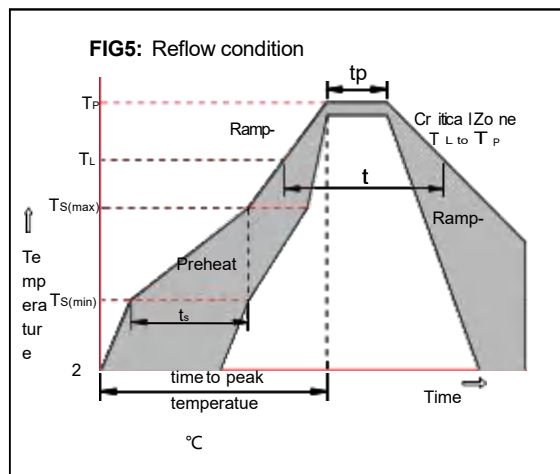

Package Dimensions & Suggested Pad Layout

SOT-363

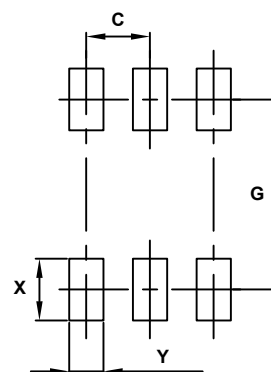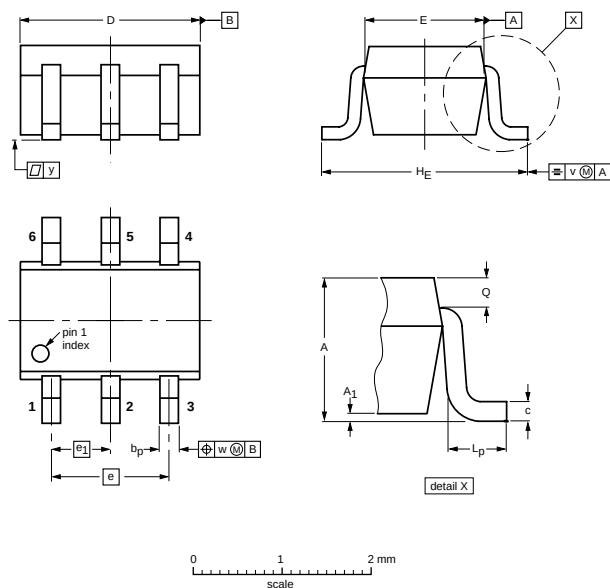


Dimensions	Value (in mm)
C	0.65
G	1.90
X	0.85
Y	0.40

DIMENSIONS (mm are the original dimensions)

UNIT	A	A1 max	b _p	c	D	E	e	e ₁	H _E	L _P	Q	v	w	y
mm	1.1 0.8	0.1	0.30 0.20	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.25 0.15	0.2	0.2	0.1


Tape & reel specification

Tape

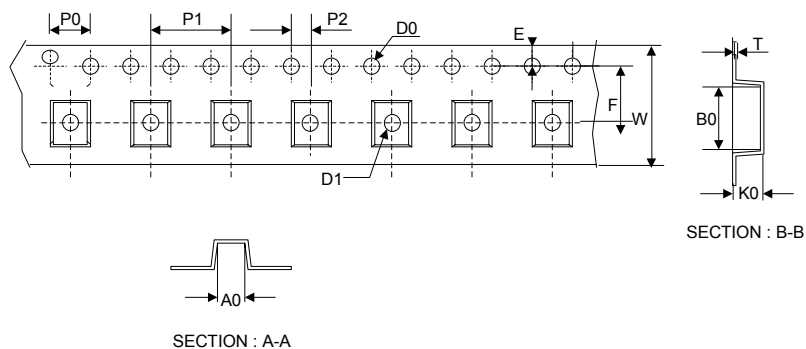

Symbol	Dimension (mm)
P0	4.00±0.20
P1	4.00±0.20
P2	2.00±0.20
D0	1.55±0.20
D1	1.00±0.20
E	1.55±0.25
F	3.60±0.20
W	8.00±0.20
A0	3.00±0.20
B0	3.00±0.20
K0	1.30±0.20
T	0.20±0.20
D2	177.0±5.0
D3	55Min.
D4	R24.6±2.0
G	R82.0±2.0
I	13.0±2.0
W1	10.20±3.0

7" Reel

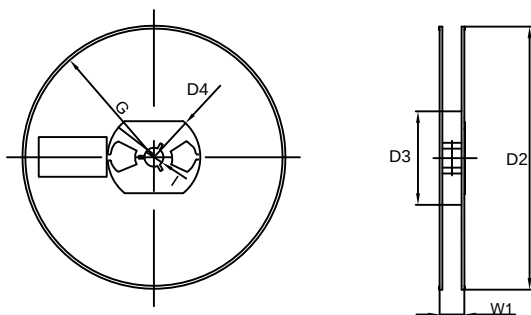

Quantity: 3000PCS